


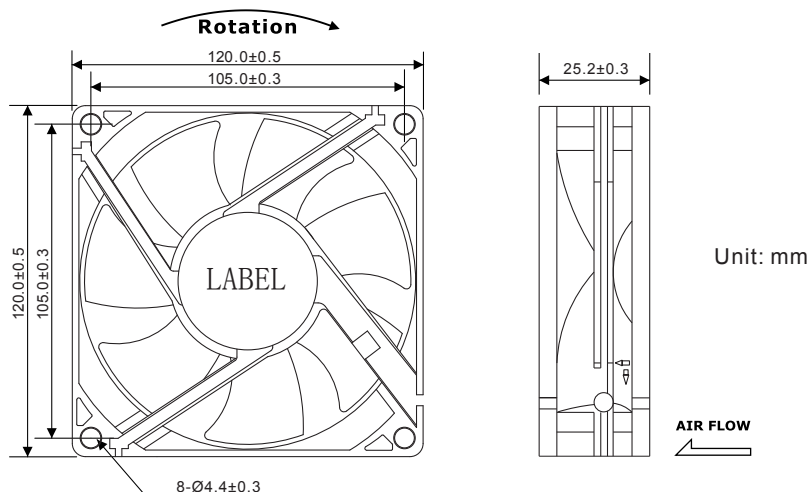


General Specification:

- Lead Wire: UL Type (+)Red (-)Black

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

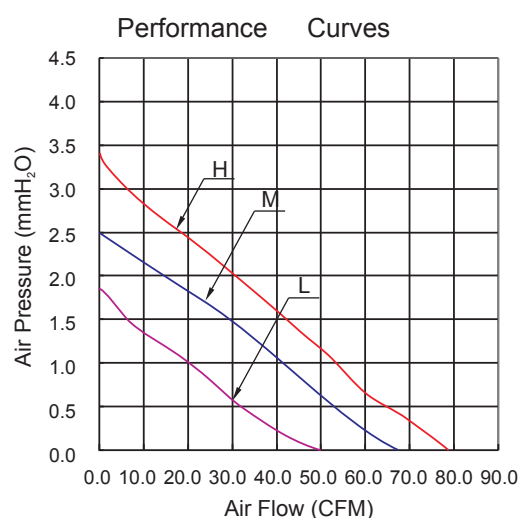

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC12025L05S/UV CC12025L05B/UV CC12025L05D/UV	Sleeve 1-Ball 2-Ball	5V	0.30	1.50	1,200 ± 10%	50.5	1.8	28	120 X 120 X 25
CC12025M05S/UV CC12025M05B/UV CC12025M05D/UV	Sleeve 1-Ball 2-Ball	5V	0.35	1.75	1,500 ± 10%	66.2	2.5	31	120 X 120 X 25
CC12025H05S/UV CC12025H05B/UV CC12025H05D/UV	Sleeve 1-Ball 2-Ball	5V	0.53	2.65	2,200 ± 10%	79.1	3.3	36	120 X 120 X 25
CC12025L12S/UV CC12025L12B/UV CC12025L12D/UV	Sleeve 1-Ball 2-Ball	12V	0.19	2.28	1,200 ± 10%	50.5	1.8	28	120 X 120 X 25
CC12025M12S/UV CC12025M12B/UV CC12025M12D/UV	Sleeve 1-Ball 2-Ball	12V	0.27	3.24	1,500 ± 10%	66.2	2.5	31	120 X 120 X 25
CC12025H12S/UV CC12025H12B/UV CC12025H12D/UV	Sleeve 1-Ball 2-Ball	12V	0.37	4.44	2,200 ± 10%	79.1	3.3	36	120 X 120 X 25
CC12025L24S/UV CC12025L24B/UV CC12025L24D/UV	Sleeve 1-Ball 2-Ball	24V	0.17	4.08	1,200 ± 10%	50.5	1.8	28	120 X 120 X 25
CC12025M24S/UV CC12025M24B/UV CC12025M24D/UV	Sleeve 1-Ball 2-Ball	24V	0.19	4.56	1,500 ± 10%	66.2	2.5	31	120 X 120 X 25
CC12025H24S/UV CC12025H24B/UV CC12025H24D/UV	Sleeve 1-Ball 2-Ball	24V	0.25	6.00	2,200 ± 10%	79.1	3.3	36	120 X 120 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.