


General Specification:

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

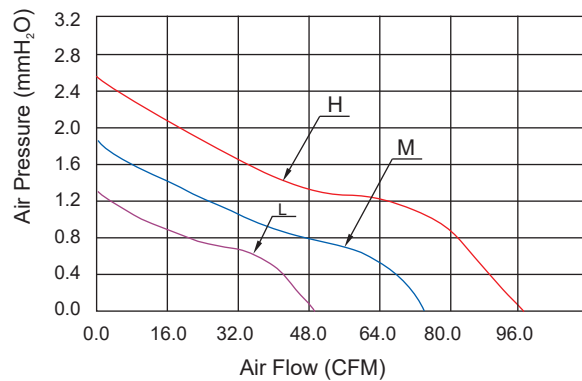

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC14025L12S	Sleeve	12V	0.08	0.96	1,000 ± 10%	48.2	1.30	24	140 X 140 X 25
CC14025M12S	Sleeve	12V	0.12	1.44	1,500 ± 10%	72.3	1.90	31	140 X 140 X 25
CC14025H12S	Sleeve	12V	0.38	4.56	2,000 ± 10%	96.4	2.50	37	140 X 140 X 25
CC14025L24S	Sleeve	24V	0.05	1.20	1,000 ± 10%	48.2	1.30	24	140 X 140 X 25
CC14025M24S	Sleeve	24V	0.10	2.40	1,500 ± 10%	72.3	1.90	31	140 X 140 X 25
CC14025H24S	Sleeve	24V	0.18	4.32	2,000 ± 10%	96.4	2.50	37	140 X 140 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.