


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

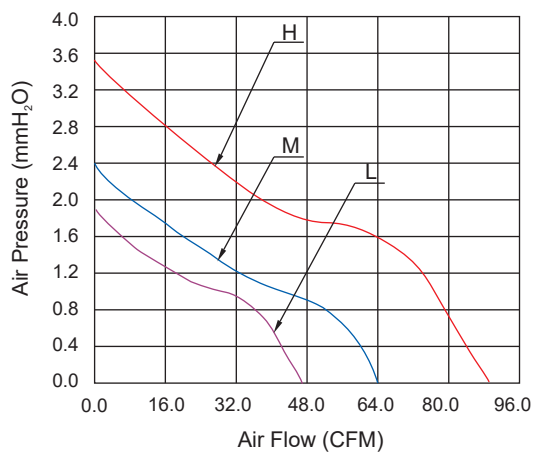

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC14025L12S CC14025L12D CC14025L12SH	Sleeve 2-Ball Hydraulic	12V	0.08	0.96	1,000 ± 10%	46.0	1.70	24	140 X 140 X 25
CC14025M12S CC14025M12D CC14025M12SH	Sleeve 2-Ball Hydraulic	12V	0.12	1.44	1,400 ± 10%	64.0	2.40	31	140 X 140 X 25
CC14025H12S CC14025H12D CC14025H12SH	Sleeve 2-Ball Hydraulic	12V	0.17	2.04	2,000 ± 10%	91.2	3.50	37	140 X 140 X 25
CC14025L24S CC14025L24D CC14025L24SH	Sleeve 2-Ball Hydraulic	24V	0.05	1.20	1,000 ± 10%	46.0	1.70	24	140 X 140 X 25
CC14025M24S CC14025M24D CC14025M24SH	Sleeve 2-Ball Hydraulic	24V	0.07	1.68	1,400 ± 10%	64.0	2.40	31	140 X 140 X 25
CC14025H24S CC14025H24D CC14025H24SH	Sleeve 2-Ball Hydraulic	24V	0.18	4.32	2,000 ± 10%	91.2	3.50	37	140 X 140 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.