


Performance Curves

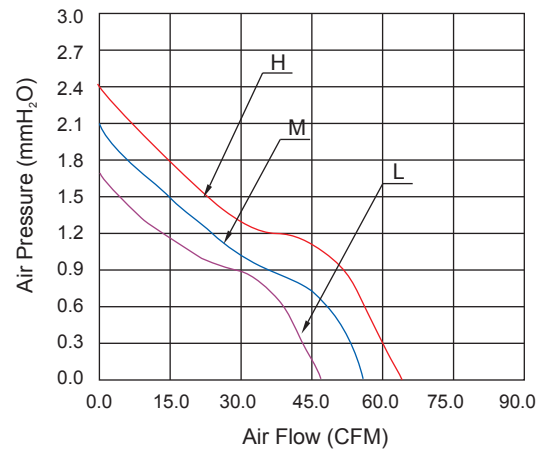

**General Specification:**

- Lead Wire: UL Type (+)Red (-)Black

**Motor Protection:**

- Impedance Protected
- Reverse Polarity Protected

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC14025L12S(B)/LED CC14025L12D(B)/LED CC14025L12SH(B)/LED	Sleeve 2-Ball Hydraulic	12V	0.15	1.80	1,000 ± 10%	46.0	1.70	24	140 X 140 X 25
CC14025M12S(B)/LED CC14025M12D(B)/LED CC14025M12SH(B)/LED	Sleeve 2-Ball Hydraulic	12V	0.17	2.04	1,200 ± 10%	55.0	2.10	27	140 X 140 X 25
CC14025H12S(B)/LED CC14025H12D(B)/LED CC14025H12SH(B)/LED	Sleeve 2-Ball Hydraulic	12V	0.19	2.28	1,400 ± 10%	64.5	2.40	31	140 X 140 X 25
CC14025L24S(B)/LED CC14025L24D(B)/LED CC14025L24SH(B)/LED	Sleeve 2-Ball Hydraulic	24V	0.12	2.88	1,000 ± 10%	46.0	1.70	24	140 X 140 X 25
CC14025M24S(B)/LED CC14025M24D(B)/LED CC14025M24SH(B)/LED	Sleeve 2-Ball Hydraulic	24V	0.13	3.12	1,200 ± 10%	55.0	2.10	27	140 X 140 X 25
CC14025H24S(B)/LED CC14025H24D(B)/LED CC14025H24SH(B)/LED	Sleeve 2-Ball Hydraulic	24V	0.17	4.08	1,400 ± 10%	64.5	2.40	31	140 X 140 X 25

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.