


Unit: mm

General Specification:

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature:
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

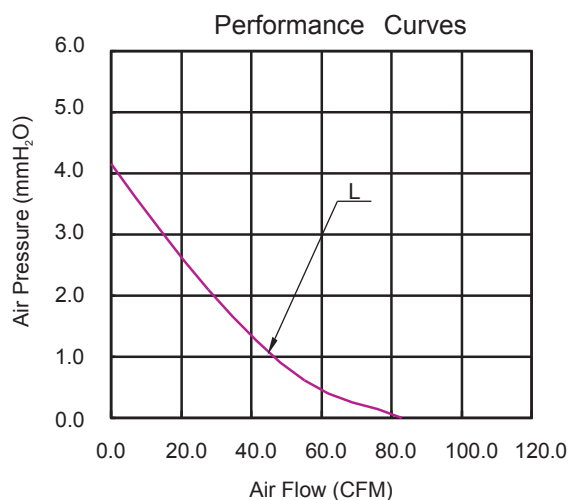

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC18025M12S	Sleeve	12V	0.16	1.92	1,030 ± 10%	84.0	4.1	31	180 x 180 x 25
CC18025M12B	Sleeve	12V	0.16	1.92	1,030 ± 10%	84.0	4.1	31	180 x 180 x 25