



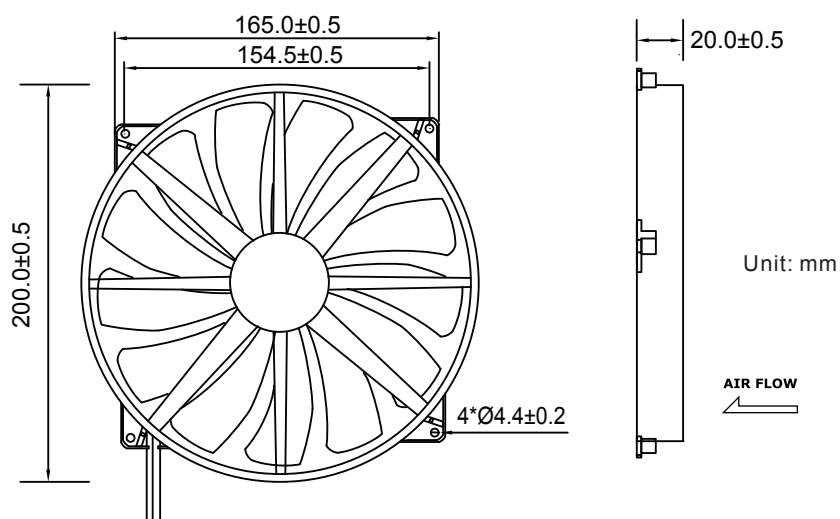

Performance Curves

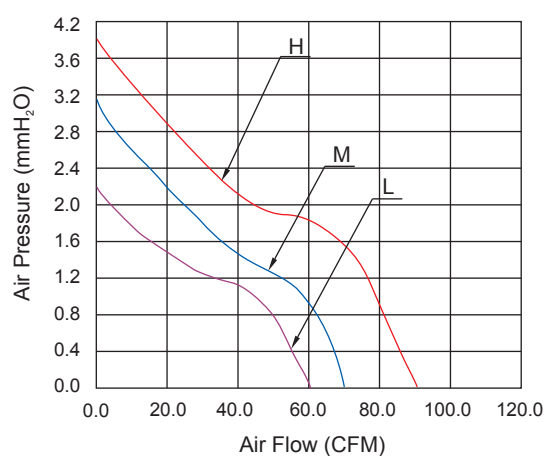

General Specification:

- Lead Wire: UL Type (+)Red (-)Black

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC20020L05S	Sleeve	5V	0.26	1.30	400 ± 10%	60.50	2.20	21	200 X 200 X 20
CC20020M05S	Sleeve	5V	0.30	1.50	600 ± 10%	65.58	3.08	24	200 X 200 X 20
CC20020H05S	Sleeve	5V	0.33	1.65	800 ± 10%	87.70	4.10	28	200 X 200 X 20
CC20020L12S	Sleeve	12V	0.10	1.20	400 ± 10%	60.50	2.20	21	200 X 200 X 20
CC20020M12S	Sleeve	12V	0.13	1.56	600 ± 10%	65.58	1.08	24	200 X 200 X 20
CC20020H12S	Sleeve	12V	0.15	1.80	800 ± 10%	87.70	4.10	28	200 X 200 X 20

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.