


### General Specification :

- Lead Wire: UL Type (+)Red (-)Black

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

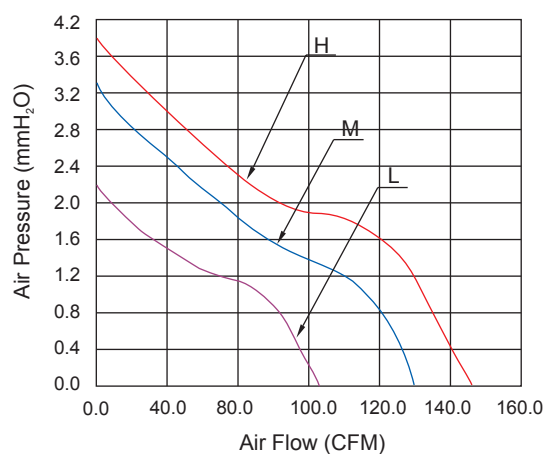

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC20020L05S	Sleeve	5V	0.33	1.66	400 ± 10%	60.50	2.20	21	200 X 200 X 20
CC20020M05S	Sleeve	5V	0.37	1.86	600 ± 10%	65.58	3.15	24	200 X 200 X 20
CC20020H05S	Sleeve	5V	0.40	2.01	800 ± 10%	87.70	4.10	28	200 X 200 X 20
CC20020L12S	Sleeve	12V	0.17	2.06	400 ± 10%	60.50	2.20	21	200 X 200 X 20
CC20020M12S	Sleeve	12V	0.20	2.42	600 ± 10%	65.58	3.15	24	200 X 200 X 20
CC20020H12S	Sleeve	12V	0.22	2.66	800 ± 10%	87.70	4.10	28	200 X 200 X 20

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.