


Unit: mm

### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

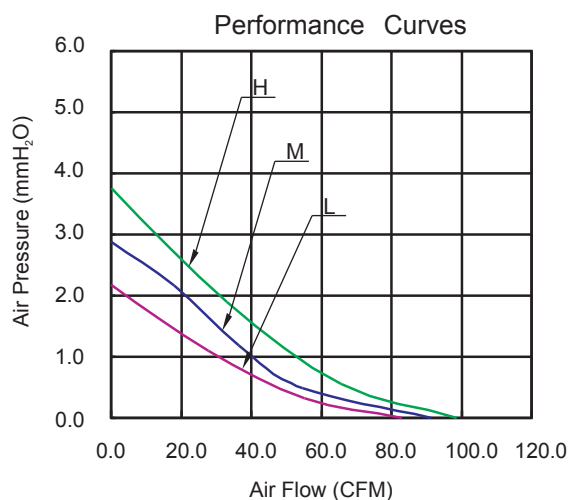

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC22030L12S/LED	Sleeve	12V	0.28	3.36	400 ± 10%	81.6	2.10	27	220 x 220 x 30
CC22030M12S/LED	Sleeve	12V	0.35	4.20	600 ± 10%	89.0	2.90	30	220 x 220 x 30
CC22030H12S/LED	Sleeve	12V	0.42	5.04	800 ± 10%	96.4	3.70	33	220 x 220 x 30

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.