


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

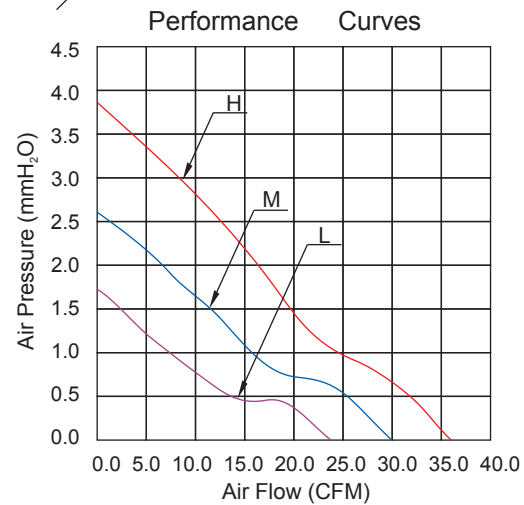

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC2510L05S	Sleeve	5V	0.11	0.55	7,000 ± 10%	1.4	2.5	19	25 X 25 X 10
CC2510L05D	2 Ball								
CC2510M05S	Sleeve	5V	0.16	0.80	10,000 ± 10%	2.3	4.6	23	25 X 25 X 10
CC2510M05D	2 Ball								
CC2510H05S	Sleeve	5V	0.20	1.00	13,000 ± 10%	3.0	8.1	30	25 X 25 X 10
CC2510H05D	2 Ball								
CC2510L12S	Sleeve	12V	0.07	0.84	7,000 ± 10%	1.4	2.5	19	25 X 25 X 10
CC2510L12D	2 Ball								
CC2510M12S	Sleeve	12V	0.08	0.96	10,000 ± 10%	2.3	4.6	23	25 X 25 X 10
CC2510M12D	2 Ball								
CC2510H12S	Sleeve	12V	0.10	1.20	13,000 ± 10%	3.0	8.1	30	25 X 25 X 10
CC2510H12D	2 Ball								
CC2510L24S	Sleeve	24V	0.04	0.96	7,000 ± 10%	1.8	0.17	20	25 X 25 X 10
CC2510L24D	2 Ball								
CC2510M24S	Sleeve	24V	0.06	1.44	10,000 ± 10%	2.3	0.24	23	25 X 25 X 10
CC2510M24D	2 Ball								
CC2510H24S	Sleeve	24V	0.09	2.16	13,000 ± 10%	3.2	0.32	30	25 X 25 X 10
CC2510H24D	2 Ball								

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.