

Unit: (mm)


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

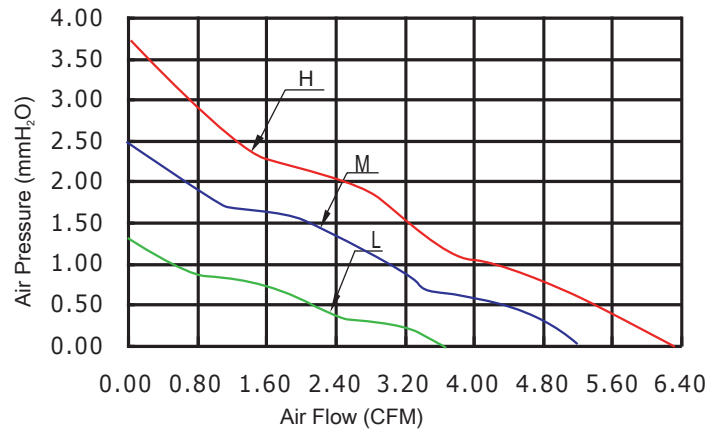

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC3510L05S	Sleeve	5V	0.14	0.70	5,000 ± 10%	3.5	1.3	23	35 X 35 X 10
CC3510L05SH	Hydraulic								
CC3510M05S	Sleeve	5V	0.22	1.10	7,000 ± 10%	5.0	2.5	27	35 X 35 X 10
CC3510M05SH	Hydraulic								
CC3510H05S	Sleeve	5V	0.25	1.25	9,000 ± 10%	6.3	3.7	31	35 X 35 X 10
CC3510H05SH	Hydraulic								
CC3510L12S	Sleeve	12V	0.08	0.96	5,000 ± 10%	3.5	1.3	23	35 X 35 X 10
CC3510L12SH	Hydraulic								
CC3510M12S	Sleeve	12V	0.10	1.20	7,000 ± 10%	5.0	2.5	27	35 X 35 X 10
CC3510M12SH	Hydraulic								
CC3510H12S	Sleeve	12V	0.12	1.44	9,000 ± 10%	6.3	3.7	31	35 X 35 X 10
CC3510H12SH	Hydraulic								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.