


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

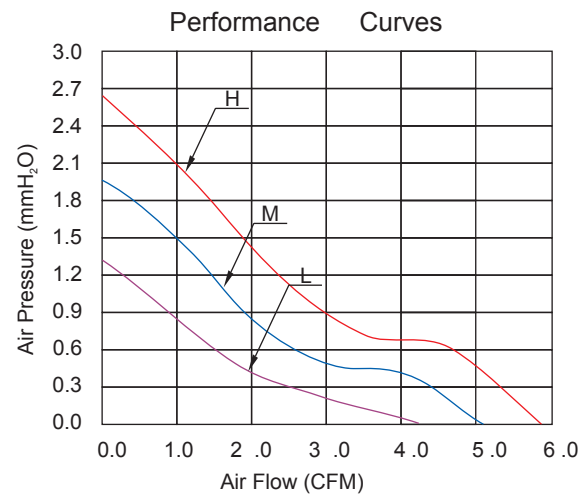

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC4007L05S	Sleeve	5V	0.13	0.65	4,500 ± 10%	4.12	1.23	20	40 X 40 X 07
CC4007M05S	Sleeve	5V	0.16	0.80	5,500 ± 10%	5.16	1.86	22	40 X 40 X 07
CC4007H05S	Sleeve	5V	0.25	1.25	6,500 ± 10%	5.85	2.66	26	40 X 40 X 07
CC4007L12S	Sleeve	12V	0.11	1.32	4,500 ± 10%	4.12	1.23	20	40 X 40 X 07
CC4007M12S	Sleeve	12V	0.14	1.68	5,500 ± 10%	5.16	1.86	22	40 X 40 X 07
CC4007H12S	Sleeve	12V	0.17	2.04	6,500 ± 10%	5.85	2.66	26	40 X 40 X 07

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.