


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

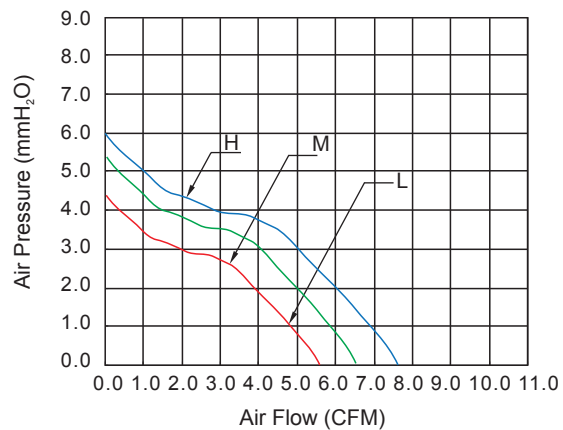

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC4015L05S CC4015L05B CC4015L05D	Sleeve 1-Ball 2-Ball	5V	0.15	0.75	5,000 ± 10%	5.40	4.30	22	40 X 40 X 15
CC4015M05S CC4015M05B CC4015M05D	Sleeve 1-Ball 2-Ball	5V	0.18	0.90	6,000 ± 10%	6.45	5.10	26	40 X 40 X 15
CC4015H05S CC4015H05B CC4015H05D	Sleeve 1-Ball 2-Ball	5V	0.25	1.25	7,000 ± 10%	7.50	6.00	30	40 X 40 X 15
CC4015L12S CC4015L12B CC4015L12D	Sleeve 1-Ball 2-Ball	12V	0.08	0.96	5,000 ± 10%	5.40	4.30	22	40 X 40 X 15
CC4015M12S CC4015M12B CC4015M12D	Sleeve 1-Ball 2-Ball	12V	0.10	1.20	6,000 ± 10%	6.45	5.10	26	40 X 40 X 15
CC4015H12S CC4015H12B CC4015H12D	Sleeve 1-Ball 2-Ball	12V	0.12	1.44	7,000 ± 10%	7.50	6.00	30	40 X 40 X 15
CC4015L24S CC4015L24B CC4015L24D	Sleeve 1-Ball 2-Ball	24V	0.04	0.96	5,000 ± 10%	5.40	4.30	22	40 X 40 X 15
CC4015M24S CC4015M24B CC4015M24D	Sleeve 1-Ball 2-Ball	24V	0.05	1.20	6,000 ± 10%	6.45	5.10	26	40 X 40 X 15
CC4015H24S CC4015H24B CC4015H24D	Sleeve 1-Ball 2-Ball	24V	0.06	1.44	7,000 ± 10%	7.50	6.00	30	40 X 40 X 15

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.