


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C ~ +70°C  
Humidity: 35% ~ 85%RH
- Store Temperature :  
Temperature: -40°C ~ +70°C  
Humidity: 35% ~ 85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

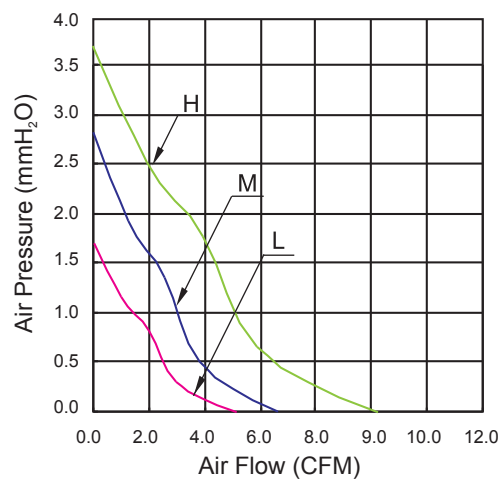

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC4510L05S	Sleeve	5V	0.13	0.65	4,000 ± 10%	5.40	1.60	25.0	45 X 45 X 10
CC4510L05B	1- Ball								
CC4510M05S	Sleeve	5V	0.16	0.80	5,000 ± 10%	6.40	2.70	30.0	45 X 45 X 10
CC4510M05B	1- Ball								
CC4510H05S	Sleeve	5V	0.21	1.05	6,000 ± 10%	9.10	3.80	35.0	45 X 45 X 10
CC4510H05B	1- Ball								
CC4510L12S	Sleeve	12V	0.08	0.96	4,000 ± 10%	5.40	1.60	25.0	45 X 45 X 10
CC4510L12B	1- Ball								
CC4510M12S	Sleeve	12V	0.09	1.08	5,000 ± 10%	6.40	2.70	30.0	45 X 45 X 10
CC4510M12B	1-Ball								
CC4510H12S	Sleeve	12V	0.10	1.20	6,000 ± 10%	9.10	3.80	35.0	45 X 45 X 10
CC4510H12B	1- Ball								
CC4510L24S	Sleeve	24V	0.04	0.96	4,000 ± 10%	4.26	1.23	22.3	45 X 45 X 10
CC4510L24B	1- Ball								
CC4510M24S	Sleeve	24V	0.07	1.68	5,000 ± 10%	6.40	2.70	30.0	45 X 45 X 10
CC4510M24B	1- Ball								
CC4510H24S	Sleeve	24V	0.09	2.16	6,000 ± 10%	9.10	3.80	35.0	45 X 45 X 10
CC4510H24B	1- Ball								

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.