


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

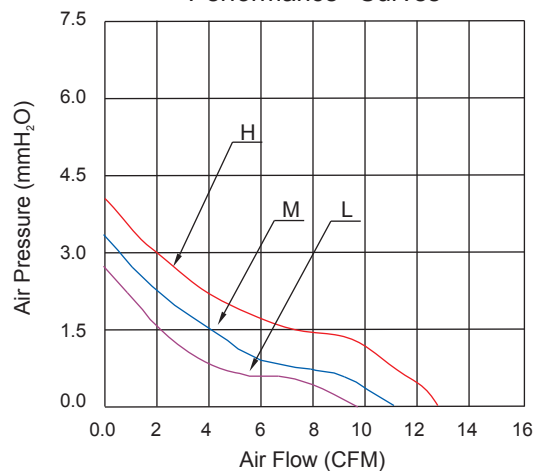

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC5015L05S CC5015L05SH CC5015L05D	Sleeve Hydraulic 2-Ball	5V	0.10	0.50	4,000 ± 10%	9.70	2.80	25.8	50 X 50 X 15
CC5015M05S CC5015M05SH CC5015M05D	Sleeve Hydraulic 2-Ball	5V	0.14	0.70	4,500 ± 10%	10.90	3.20	29.0	50 X 50 X 15
CC5015H05S CC5015H05SH CC5015H05D	Sleeve Hydraulic 2-Ball	5V	0.18	0.90	5,000 ± 10%	12.40	3.80	31.0	50 X 50 X 15
CC5015L12S CC5015L12SH CC5015L12D	Sleeve Hydraulic 2-Ball	12V	0.06	0.72	4,000 ± 10%	9.70	2.80	25.8	50 X 50 X 15
CC5015M12S CC5015M12SH CC5015M12D	Sleeve Hydraulic 2-Ball	12V	0.09	1.08	4,500 ± 10%	10.90	3.20	29.0	50 X 50 X 15
CC5015H12S CC5015H12SH CC5015H12D	Sleeve Hydraulic 2-Ball	12V	0.10	1.20	5,000 ± 10%	12.40	3.80	31.0	50 X 50 X 15
CC5015L24S CC5015L24SH CC5015L24D	Sleeve Hydraulic 2-Ball	24V	0.07	1.68	4,000 ± 10%	9.70	2.80	25.8	50 X 50 X 15
CC5015M24S CC5015M24SH CC5015M24D	Sleeve Hydraulic 2-Ball	24V	0.06	1.44	4,500 ± 10%	10.90	3.20	29.0	50 X 50 X 15
CC5015H24S CC5015H24SH CC5015H24D	Sleeve Hydraulic 2-Ball	24V	0.12	2.88	5,000 ± 10%	12.40	3.80	31.0	50 X 50 X 15

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.