


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

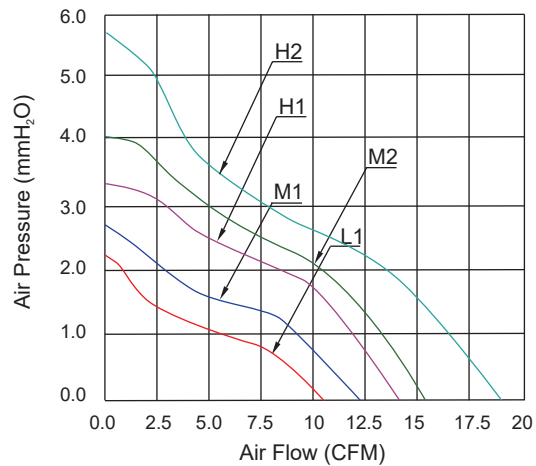

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC5020L05S CC5020L05D CC5020L05SH	Sleeve 2-Ball Hydraulic	5V	0.12	0.85	3,200 ± 10%	10.80	2.07	20.8	50 X 50 X 20
CC5020M05S CC5020M05D CC5020M05SH	Sleeve 2-Ball Hydraulic	5V	0.15	1.00	3,800 ± 10%	12.40	2.60	25.6	50 X 50 X 20
CC5020H05S CC5020H05D CC5020H05SH	Sleeve 2-Ball Hydraulic	5V	0.23	1.15	4,400 ± 10%	14.00	3.30	29.6	50 X 50 X 20
CC5020L12S CC5020L12D CC5020L12SH	Sleeve 2-Ball Hydraulic	12V	0.09	1.08	4,000 ± 10%	12.80	2.70	27.2	50 X 50 X 20
CC5020M12S CC5020M12D CC5020M12SH	Sleeve 2-Ball Hydraulic	12V	0.15	1.80	5,000 ± 10%	15.60	4.00	33.0	50 X 50 X 20
CC5020H12S CC5020H12D CC5020H12SH	Sleeve 2-Ball Hydraulic	12V	0.25	3.00	6,000 ± 10%	18.90	5.80	37.4	50 X 50 X 20
CC5020L24S CC5020L24D CC5020L24SH	Sleeve 2-Ball Hydraulic	24V	0.05	1.20	4,000 ± 10%	12.80	2.70	27.2	50 X 50 X 20
CC5020M24S CC5020M24D CC5020M24SH	Sleeve 2-Ball Hydraulic	24V	0.06	1.44	5,000 ± 10%	15.60	4.00	33.0	50 X 50 X 20
CC5020H24S CC5020H24D CC5020H24SH	Sleeve 2-Ball Hydraulic	24V	0.07	1.68	6,000 ± 10%	18.90	5.80	37.4	50 X 50 X 20

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.