


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

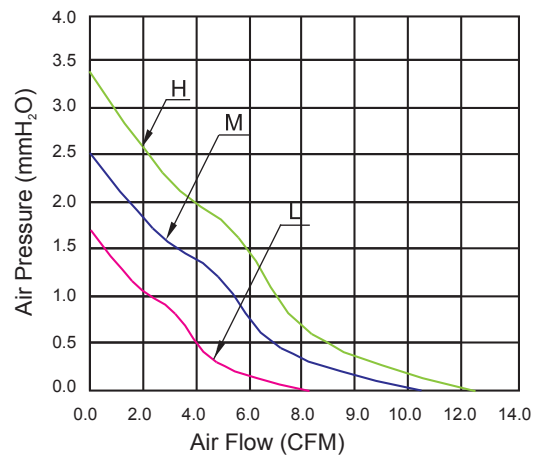

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC5210L05S CC5210L05B	Sleeve 1-Ball	5V	0.15	0.75	4,000 ± 10%	8.2	1.6	27	52 X 52 X 10
CC5210M05S CC5210M05B	Sleeve 1-Ball	5V	0.20	1.00	5,000 ± 10%	10.4	2.5	33	52 X 52 X 10
CC5210H05S CC5210H05B	Sleeve 1-Ball	5V	0.25	1.25	6,000 ± 10%	12.6	3.4	38	52 X 52 X 10
CC5210L12S CC5210L12B	Sleeve 1-Ball	12V	0.12	1.44	4,000 ± 10%	8.2	1.6	27	52 X 52 X 10
CC5210M12S CC5210M12B	Sleeve 1-Ball	12V	0.15	1.80	5,000 ± 10%	10.4	2.5	33	52 X 52 X 10
CC5210H12S CC5210H12B	Sleeve 1-Ball	12V	0.18	2.16	6,000 ± 10%	12.6	3.4	38	52 X 52 X 10
CC5210L24S CC5210L24B	Sleeve 1-Ball	24V	0.05	1.20	4,000 ± 10%	8.2	1.6	27	52 X 52 X 10
CC5210M24S CC5210M24B	Sleeve 1-Ball	24V	0.07	1.68	5,000 ± 10%	10.4	2.5	33	52 X 52 X 10
CC5210H24S CC5210H24B	Sleeve 1-Ball	24V	0.09	2.16	6,000 ± 10%	12.6	3.4	38	52 X 52 X 10

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.