


Unit: mm

General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

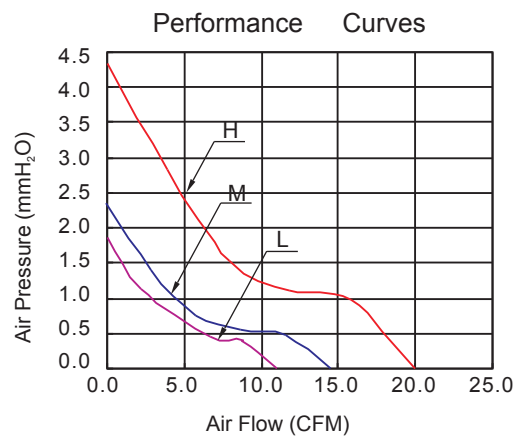

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC6025L05S CC6025L05D	Sleeve 2-Ball	5V	0.12	0.60	2,500 ± 10%	11.80	1.70	20	60 X 60 X 25
CC6025M05S CC6025M05D	Sleeve 2-Ball	5V	0.15	0.75	3,000 ± 10%	14.10	2.40	22	60 X 60 X 25
CC6025H05S CC6025H05D	Sleeve 2-Ball	5V	0.20	1.00	4,000 ± 10%	19.20	4.20	28	60 X 60 X 25
CC6025L12S CC6025L12D	Sleeve 2-Ball	12V	0.08	0.96	2,500 ± 10%	11.80	1.70	20	60 X 60 X 25
CC6025M12S CC6025M12D	Sleeve 2-Ball	12V	0.09	1.08	3,000 ± 10%	14.10	2.40	22	60 X 60 X 25
CC6025H12S CC6025H12D	Sleeve 2-Ball	12V	0.12	1.44	4,000 ± 10%	19.20	4.20	28	60 X 60 X 25
CC6025L24S CC6025L24D	Sleeve 2-Ball	24V	0.05	1.68	2,500 ± 10%	11.80	1.70	20	60 X 60 X 25
CC6025M24S CC6025M24D	Sleeve 2-Ball	24V	0.06	1.92	3,000 ± 10%	14.10	2.40	22	60 X 60 X 25
CC6025H24S CC6025H24D	Sleeve 2-Ball	24V	0.11	2.64	4,000 ± 10%	19.20	4.20	28	60 X 60 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.