


Unit: mm

General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

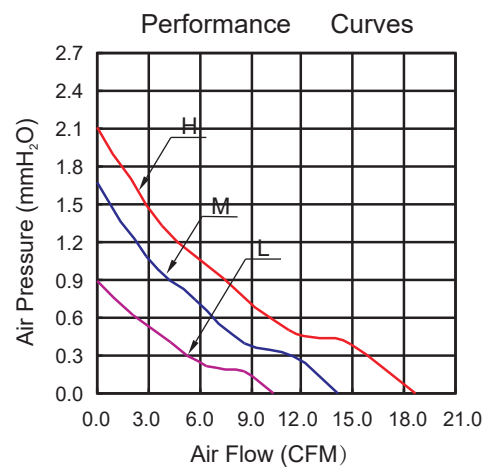

| Item No. | Bearing System | Rated Voltage (V DC) | Rated Current (AMP) | Input Power (Watt) | Fan Speed (RPM) | Air Flow (CFM) | Static Pressure (MM-H2O) | Noise Level (dBA) | Dimension (mm) |
|---|-------------------------------|----------------------|---------------------|--------------------|-----------------|----------------|--------------------------|-------------------|----------------|
| CC7010L05S CC7010L05B CC7010L05SH | Sleeve 1-Ball Hydraulic | 5V | 0.28 | 1.40 | 2,000 ± 10% | 10.4 | 0.9 | 24 | 70 X 70 X 10 |
| CC7010M05S CC7010M05B CC7010M05SH | Sleeve 1-Ball Hydraulic | 5V | 0.35 | 1.75 | 2,500 ± 10% | 14.7 | 1.6 | 27 | 70 X 70 X 10 |
| CC7010H05S CC7010H05B CC7010H05SH | Sleeve 1-Ball Hydraulic | 5V | 0.42 | 2.10 | 3,000 ± 10% | 18.5 | 2.1 | 31 | 70 X 70 X 10 |
| CC7010L12S CC7010L12B CC7010L12SH | Sleeve 1-Ball Hydraulic | 12V | 0.15 | 1.80 | 2,000 ± 10% | 10.4 | 0.9 | 24 | 70 X 70 X 10 |
| CC7010M12S CC7010M12B CC7010M12SH | Sleeve 1-Ball Hydraulic | 12V | 0.19 | 2.28 | 2,500 ± 10% | 14.7 | 1.6 | 27 | 70 X 70 X 10 |
| CC7010H12S CC7010H12B CC7010H12SH | Sleeve 1-Ball Hydraulic | 12V | 0.25 | 3.12 | 3,000 ± 10% | 18.5 | 2.1 | 31 | 70 X 70 X 10 |
| CC7010L24S CC7010L24B CC7010L24SH | Sleeve 1-Ball Hydraulic | 24V | 0.08 | 1.92 | 2,000 ± 10% | 10.4 | 0.9 | 24 | 70 X 70 X 10 |
| CC7010M24S CC7010M24B CC7010M24SH | Sleeve 1-Ball Hydraulic | 24V | 0.12 | 2.88 | 2,500 ± 10% | 14.7 | 1.6 | 27 | 70 X 70 X 10 |
| CC7010H24S CC7010H24B CC7010H24SH | Sleeve 1-Ball Hydraulic | 24V | 0.16 | 3.84 | 3,000 ± 10% | 18.5 | 2.1 | 31 | 70 X 70 X 10 |

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.