


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

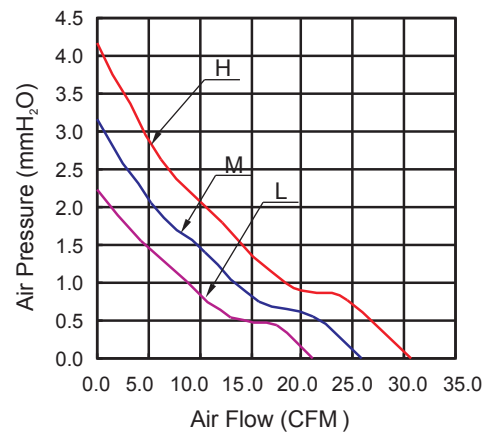

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC7025L05S CC7025L05D	Sleeve 2-Ball	5V	0.25	1.25	2,700 ± 10%	21.78	2.21	24.2	70 X 70 X 25
CC7025M05S CC7025M05D	Sleeve 2-Ball	5V	0.35	1.75	3,200 ± 10%	25.98	3.08	28.6	70 X 70 X 25
CC7025H05S CC7025H05D	Sleeve 2-Ball	5V	0.47	2.35	3,700 ± 10%	30.33	4.10	32.4	70 X 70 X 25
CC7025L12S CC7025L12D	Sleeve 2-Ball	12V	0.12	1.44	2,700 ± 10%	21.78	2.21	24.2	70 X 70 X 25
CC7025M12S CC7025M12D	Sleeve 2-Ball	12V	0.17	2.04	3,200 ± 10%	25.98	3.08	28.6	70 X 70 X 25
CC7025H12S CC7025H12D	Sleeve 2-Ball	12V	0.25	3.00	3,700 ± 10%	30.33	4.10	32.4	70 X 70 X 25
CC7025L24S CC7025L24D	Sleeve 2-Ball	24V	0.06	1.44	2,700 ± 10%	21.78	2.21	24.2	70 X 70 X 25
CC7025M24S CC7025M24D	Sleeve 2-Ball	24V	0.10	2.40	3,200 ± 10%	25.98	3.08	28.6	70 X 70 X 25
CC7025H24S CC7025H24D	Sleeve 2-Ball	24V	0.12	2.88	3,700 ± 10%	30.33	4.10	32.4	70 X 70 X 25

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.