


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

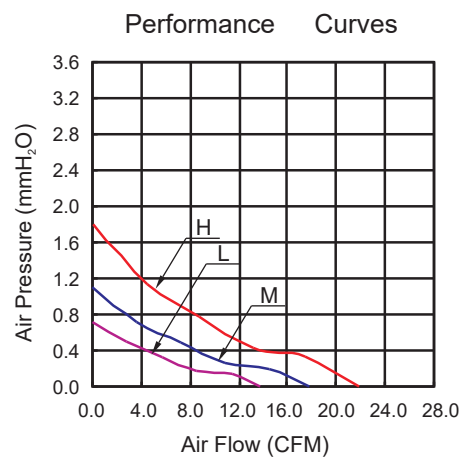

| Item No.   | Bearing System | Rated Voltage (V DC) | Rated Current (AMP) | Input Power (Watt) | Fan Speed (RPM) | Air Flow (CFM) | Static Pressure (MM-H2O) | Noise Level (dBA) | Dimension (mm) |
|------------|----------------|----------------------|---------------------|--------------------|-----------------|----------------|--------------------------|-------------------|----------------|
| CC8010L05S | Sleeve         | 5V                   | 0.24                | 1.20               | 2,000 ± 10%     | 13.6           | 0.74                     | 19.7              | 80 X 80 X 10   |
| CC8010L05B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010M05S | Sleeve         | 5V                   | 0.30                | 1.50               | 2,500 ± 10%     | 17.7           | 1.18                     | 23.3              | 80 X 80 X 10   |
| CC8010M05B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010H05S | Sleeve         | 5V                   | 0.36                | 1.80               | 3,000 ± 10%     | 21.7           | 1.73                     | 27.9              | 80 X 80 X 10   |
| CC8010H05B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010L12S | Sleeve         | 12V                  | 0.16                | 1.92               | 2,000 ± 10%     | 13.6           | 0.74                     | 19.7              | 80 X 80 X 10   |
| CC8010L12B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010M12S | Sleeve         | 12V                  | 0.20                | 2.40               | 2,500 ± 10%     | 17.7           | 1.18                     | 23.3              | 80 X 80 X 10   |
| CC8010M12B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010H12S | Sleeve         | 12V                  | 0.25                | 3.00               | 3,000 ± 10%     | 21.7           | 1.73                     | 27.9              | 80 X 80 X 10   |
| CC8010H12B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010L24S | Sleeve         | 24V                  | 0.06                | 1.44               | 2,000 ± 10%     | 13.6           | 0.74                     | 19.7              | 80 X 80 X 10   |
| CC8010L24B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010M24S | Sleeve         | 24V                  | 0.08                | 1.92               | 2,500 ± 10%     | 17.7           | 1.18                     | 23.3              | 80 X 80 X 10   |
| CC8010M24B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |
| CC8010H24S | Sleeve         | 24V                  | 0.11                | 2.64               | 3,000 ± 10%     | 21.7           | 1.73                     | 27.9              | 80 X 80 X 10   |
| CC8010H24B | 1-Ball         |                      |                     |                    |                 |                |                          |                   |                |