


Unit: mm

General Specification:

- Lead Wire: UL Type (+)Red (-)Black

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

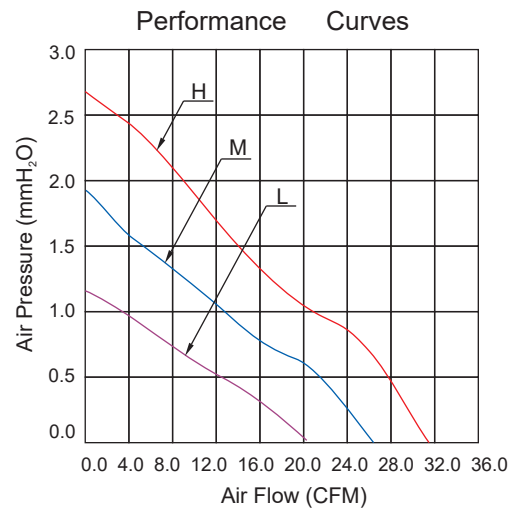

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC8015L05S	Sleeve	5V	0.23	1.15	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015L05D	2-Ball								
CC8015M05S	Sleeve	5V	0.29	1.45	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015M05D	2-Ball								
CC8015H05S	Sleeve	5V	0.35	1.75	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15
CC8015H05D	2-Ball								
CC8015L12S	Sleeve	12V	0.10	1.20	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015L12D	2-Ball								
CC8015M12S	Sleeve	12V	0.14	1.56	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015M12D	2-Ball								
CC8015H12S	Sleeve	12V	0.20	1.80	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15
CC8015H12D	2-Ball								
CC8015L24S	Sleeve	24V	0.10	2.40	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015L24D	2-Ball								
CC8015M24S	Sleeve	24V	0.13	3.12	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015M24D	2-Ball								
CC8015H24S	Sleeve	24V	0.15	3.60	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15
CC8015H24D	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.