


General Specification :

- Lead Wire : UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature : -10°C ~ +70°C
Humidity : 35% ~ 85%RH
- Store Temperature :
Temperature : -40°C ~ +70°C
Humidity : 35% ~ 85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

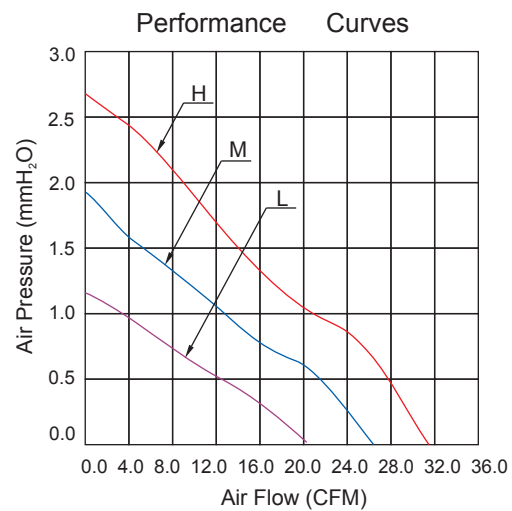

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC8015L05S/UV	Sleeve	5V	0.30	1.50	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015M05S/UV	Sleeve	5V	0.36	1.80	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015H05S/UV	Sleeve	5V	0.42	2.10	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15
CC8015L12S/UV	Sleeve	12V	0.17	2.04	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015M12S/UV	Sleeve	12V	0.20	2.40	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015H12S/UV	Sleeve	12V	0.22	2.64	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15
CC8015L24S/UV	Sleeve	24V	0.17	4.08	2,000 ± 10%	20.8	1.2	25	80 X 80 X 15
CC8015M24S/UV	Sleeve	24V	0.20	4.80	2,500 ± 10%	26.0	1.9	30	80 X 80 X 15
CC8015H24S/UV	Sleeve	24V	0.22	5.28	3,000 ± 10%	31.2	2.6	35	80 X 80 X 15

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.