

Unit: mm


AIR FLOW

### General Specification :

- Lead Wire : UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature : -10°C ~ +70°C  
Humidity : 35% ~ 85%RH
- Store Temperature :  
Temperature : -40°C ~ +70°C  
Humidity : 35% ~ 85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

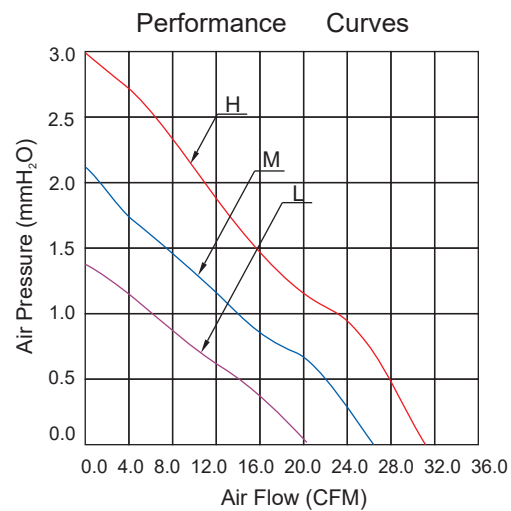

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC8020L05S CC8020L05D CC8020L05SH	Sleeve 2-Ball Hydraulic	5V	0.10	0.50	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M05S CC8020M05D CC8020M05SH	Sleeve 2-Ball Hydraulic	5V	0.25	1.25	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H05S CC8020H05D CC8020H05SH	Sleeve 2-Ball Hydraulic	5V	0.30	1.50	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20
CC8020L12S CC8020L12D CC8020L12SH	Sleeve 2-Ball Hydraulic	12V	0.10	1.20	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M12S CC8020M12D CC8020M12SH	Sleeve 2-Ball Hydraulic	12V	0.15	1.80	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H12S CC8020H12D CC8020H12SH	Sleeve 2-Ball Hydraulic	12V	0.18	2.16	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20
CC8020L24S CC8020L24D CC8020L24SH	Sleeve 2-Ball Hydraulic	24V	0.05	1.20	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M24S CC8020M24D CC8020M24SH	Sleeve 2-Ball Hydraulic	24V	0.09	2.16	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H24S CC8020H24D CC8020H24SH	Sleeve 2-Ball Hydraulic	24V	0.14	3.36	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.