


Unit: mm

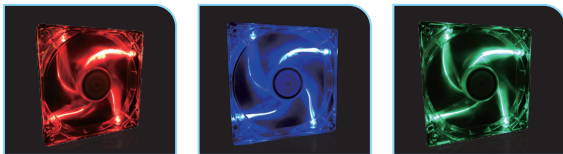

General Specification:


- Lead Wire: UL Type
(+)Red (-)Black

Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

Optional Features:

- PWM

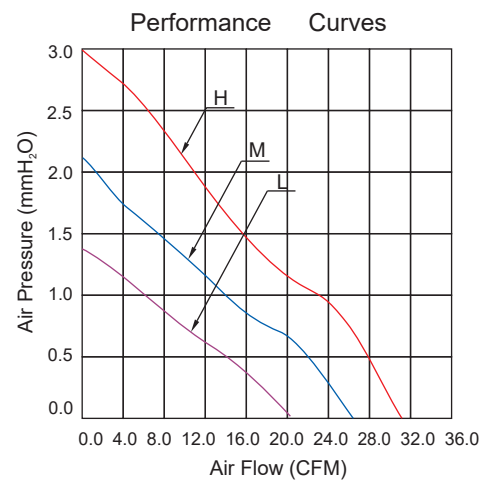

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC8020L05S /LED	Sleeve	5V	0.17	0.85	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M05S /LED	Sleeve	5V	0.33	1.65	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H05S /LED	Sleeve	5V	0.37	1.85	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20
CC8020L12S /LED	Sleeve	12V	0.17	2.04	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M12S /LED	Sleeve	12V	0.22	2.64	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H12S /LED	Sleeve	12V	0.25	3.00	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20
CC8020L24S /LED	Sleeve	24V	0.12	2.88	2,000 ± 10%	20.4	1.4	22	80 X 80 X 20
CC8020M24S /LED	Sleeve	24V	0.16	3.84	2,500 ± 10%	25.9	2.2	27	80 X 80 X 20
CC8020H24S /LED	Sleeve	24V	0.21	5.04	3,000 ± 10%	31.5	3.0	32	80 X 80 X 20

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.