

General Specification :

- Lead Wire: UL Type (+)Red (-)Black


Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Optional Features:

- PWM

Performance Curves

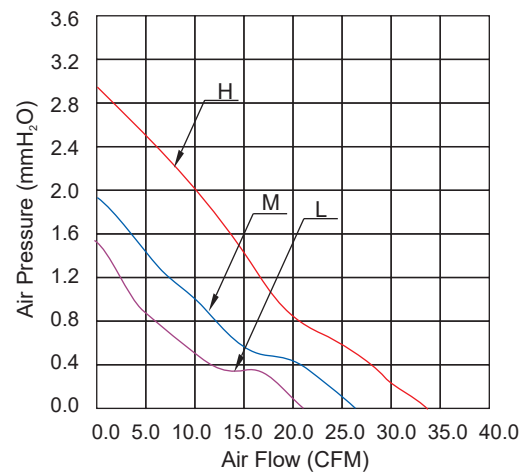

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC8025L05S CC8025L05D CC8025L05SH	Sleeve 2-Ball Hydraulic	5V	0.18	0.90	1,800 ± 10%	21.2	1.5	22	80 X 80 X 25
CC8025M05S CC8025M05D CC8025M05SH	Sleeve 2-Ball Hydraulic	5V	0.22	1.10	2,200 ± 10%	25.9	1.9	27	80 X 80 X 25
CC8025H05S CC8025H05D CC8025H05SH	Sleeve 2-Ball Hydraulic	5V	0.30	1.50	2,800 ± 10%	33.0	2.9	32	80 X 80 X 25
CC8025L12S CC8025L12D CC8025L12SH	Sleeve 2-Ball Hydraulic	12V	0.08	0.96	1,800 ± 10%	21.2	1.5	22	80 X 80 X 25
CC8025M12S CC8025M12D CC8025M12SH	Sleeve 2-Ball Hydraulic	12V	0.13	1.56	2,200 ± 10%	25.9	1.9	27	80 X 80 X 25
CC8025H12S CC8025H12D CC8025H12SH	Sleeve 2-Ball Hydraulic	12V	0.15	1.80	2,800 ± 10%	33.0	2.9	32	80 X 80 X 25
CC8025L24S CC8025L24D CC8025L24SH	Sleeve 2-Ball Hydraulic	24V	0.08	1.92	1,800 ± 10%	21.2	1.5	22	80 X 80 X 25
CC8025M24S CC8025M24D CC8025M24SH	Sleeve 2-Ball Hydraulic	24V	0.10	2.88	2,200 ± 10%	25.9	1.9	27	80 X 80 X 25
CC8025H24S CC8025H24D CC8025H24SH	Sleeve 2-Ball Hydraulic	24V	0.13	3.12	2,800 ± 10%	33.0	2.9	32	80 X 80 X 25

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.