


### General Specification:

- Lead Wire: UL Type (+)Red (-)Black

### Motor Protection:

- Impedance Protected
- Reverse Polarity Protected

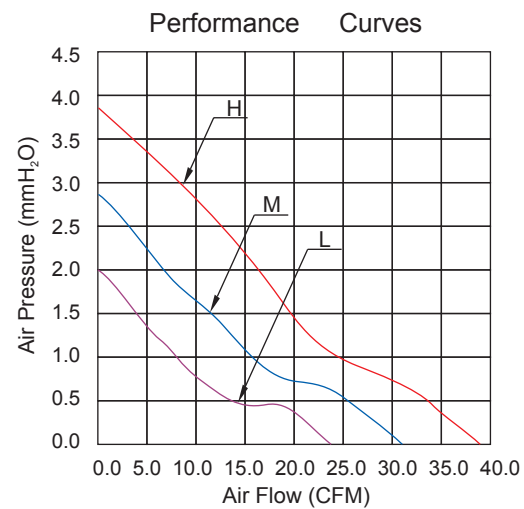

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC8025L05S/UV CC8025L05B/UV CC8025L05D/UV	Sleeve 1-Ball 2-Ball	5V	0.25	1.25	1,800 ± 10%	24.2	2.0	24	80 X 80 X 25
CC8025M05S/UV CC8025M05B/UV CC8025M05D/UV	Sleeve 1-Ball 2-Ball	5V	0.29	1.45	2,200 ± 10%	31.5	2.8	27	80 X 80 X 25
CC8025H05S/UV CC8025H05B/UV CC8025H05D/UV	Sleeve 1-Ball 2-Ball	5V	0.37	1.85	2,800 ± 10%	38.5	3.8	31	80 X 80 X 25
CC8025L12S/UV CC8025L12B/UV CC8025L12D/UV	Sleeve 1-Ball 2-Ball	12V	0.16	1.92	1,800 ± 10%	24.2	2.0	24	80 X 80 X 25
CC8025M12S/UV CC8025M12B/UV CC8025M12D/UV	Sleeve 1-Ball 2-Ball	12V	0.22	2.64	2,200 ± 10%	31.5	2.8	27	80 X 80 X 25
CC8025H12S/UV CC8025H12B/UV CC8025H12D/UV	Sleeve 1-Ball 2-Ball	12V	0.30	3.60	2,800 ± 10%	38.5	3.8	31	80 X 80 X 25
CC8025L24S/UV CC8025L24B/UV CC8025L24D/UV	Sleeve 1-Ball 2-Ball	24V	0.15	3.60	1,800 ± 10%	24.2	2.0	24	80 X 80 X 25
CC8025M24S/UV CC8025M24B/UV CC8025M24D/UV	Sleeve 1-Ball 2-Ball	24V	0.19	4.56	2,200 ± 10%	31.5	2.8	27	80 X 80 X 25
CC8025H24S/UV CC8025H24B/UV CC8025H24D/UV	Sleeve 1-Ball 2-Ball	24V	0.24	5.76	2,800 ± 10%	38.5	3.8	31	80 X 80 X 25

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.