

Unit: mm


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

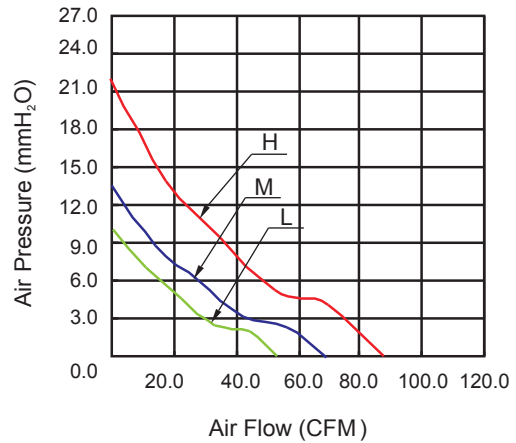

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC8038L12D	2-Ball	12V	0.40	4.80	4,000 ± 10%	52.50	10.50	43	80 X 80 X 38
CC8038M12D	2-Ball	12V	0.71	8.52	5,000 ± 10%	68.30	13.80	50	80 X 80 X 38
CC8038H12D	2-Ball	12V	0.85	10.20	6,000 ± 10%	83.40	21.80	57	80 X 80 X 38
CC8038L24D	2-Ball	24V	0.22	5.28	4,000 ± 10%	52.50	10.50	43	80 X 80 X 38
CC8038M24D	2-Ball	24V	0.28	6.72	5,000 ± 10%	68.30	13.80	50	80 X 80 X 38
CC8038H24D	2-Ball	24V	0.45	10.80	6,000 ± 10%	83.40	21.80	57	80 X 80 X 38

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.