

Unit: mm


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

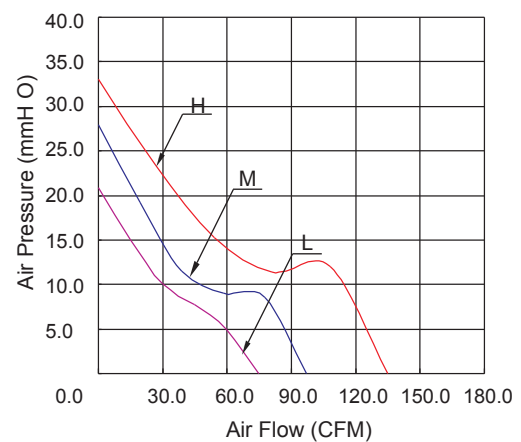

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC9238L12S	Sleeve	12V	0.23	2.76	3,500 ± 10%	71.80	21.20	32	92 X 92 X 38
CC9238L12D	2-Ball								
CC9238M12S	Sleeve	12V	0.38	4.56	4,500 ± 10%	92.30	27.30	41.6	92 X 92 X 38
CC9238M12D	2-Ball								
CC9238H12S	Sleeve	12V	0.92	11.04	5,500 ± 10%	112.00	33.40	51	92 X 92 X 38
CC9238H12D	2-Ball								
CC9238L24S	Sleeve	24V	0.12	2.88	3,500 ± 10%	71.80	21.20	32	92 X 92 X 38
CC9238L24D	2-Ball								
CC9238M24S	Sleeve	24V	0.18	4.32	4,500 ± 10%	92.30	27.30	41.6	92 X 92 X 38
CC9238M24D	2-Ball								
CC9238H24S	Sleeve	24V	0.44	10.56	5,500 ± 10%	112.00	33.40	51	92 X 92 X 38
CC9238H24D	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.