


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

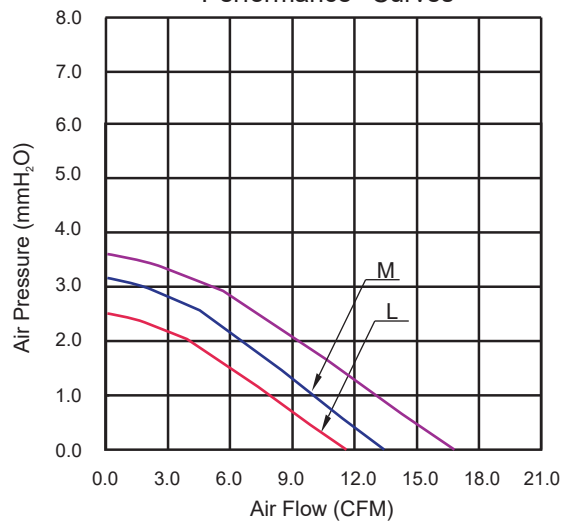

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF11025L12S (Frameless)	Sleeve	12V	0.15	1.80	1,200 ± 10%	11.0	2.50	20	Φ102 x 26
BF11025M12S (Frameless)	Sleeve	12V	0.23	3.00	1,500 ± 10%	13.8	3.10	24.6	Φ102 x 26
BF11025H12S (Frameless)	Sleeve	12V	0.27	3.24	1,800 ± 10%	16.5	3.70	30	Φ102 x 26
BF11025L24S (Frameless)	Sleeve	24V	0.14	3.36	1,200 ± 10%	11.0	2.50	20	Φ102 x 26
BF11025M24S (Frameless)	Sleeve	24V	0.22	5.28	1,500 ± 10%	13.8	3.10	24.6	Φ102 x 26
BF11025H24S (Frameless)	Sleeve	24V	0.25	10.08	1,800 ± 10%	16.5	3.40	30	Φ102 x 26

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.