
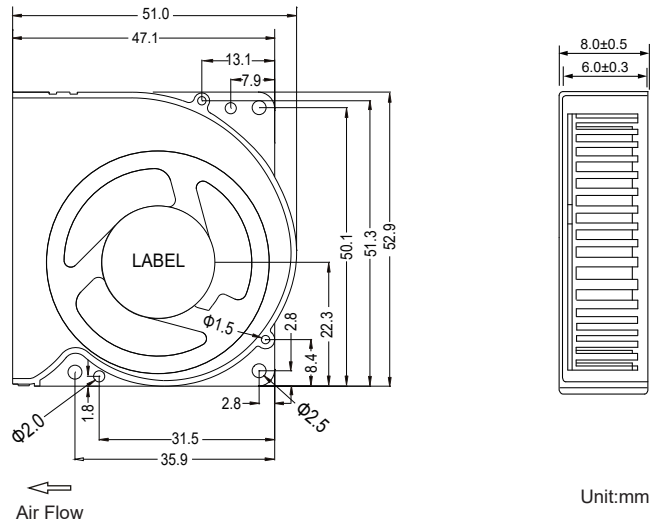



DC Blower Fan 50x50x8mm

■ 尺寸图 (DIMENSION DRAWING)

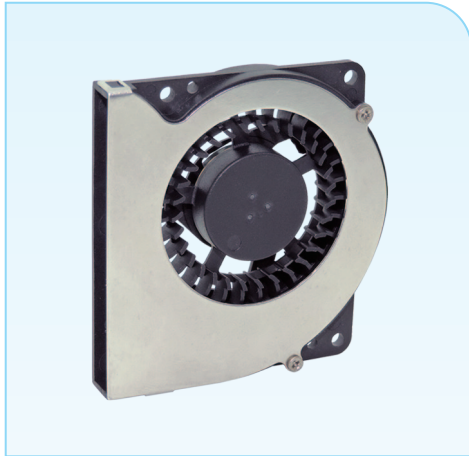

- * 轴承类型: 液压轴承 (Bearing type:Hydraulic)
- * 材料(Material):
扇叶(Impeller):PBT
框(Frame):PBT & Stainless Steel
- * 引线(Lead wire):
UL1061 AWG #28 or equivalent
红色线正级 Red Wire Positive (+)
黑色线负级 Black Wire Negative (-)
- * 可选择增加风扇功能(Functions are optional)
- * 重量(Weight):6.4g

■ 风压&风量曲线图 P and Q CURVE

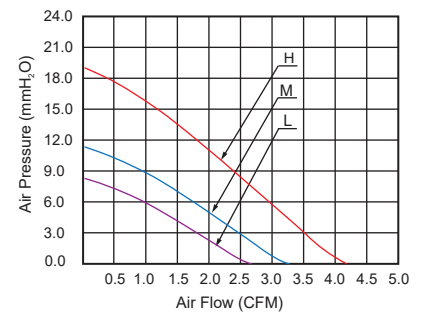

| 型号 Model | 轴承类型 Bearing Type | 电压 Rated Voltage | 电压范围 Operation Voltage | 电流 Current | 功率 Input Power | 转速 Speed | 风量 Air Flow | 风压 Static Pressure | 噪音 Noise Level |
|-------------|----------------------|---------------------|---------------------------|---------------|-------------------|-------------|----------------|-----------------------|-------------------|
| | | VDC | VDC | Amp | Watt | RPM | CFM | MM-H ₂ O | dBA |
| BF5008L05SH | Hydraulic | 5V | 4.5~5.5 | 0.10 | 0.50 | 4,000±10% | 2.60 | 8.00 | 28.0 |
| BF5008M05SH | Hydraulic | 5V | 4.5~5.5 | 0.19 | 0.95 | 5,000±10% | 3.40 | 11.4 | 33.0 |
| BF5008H05SH | Hydraulic | 5V | 4.5~5.5 | 0.36 | 1.80 | 6,000±10% | 4.20 | 19.0 | 38.0 |
| BF5008L12SH | Hydraulic | 12V | 10.8~13.2 | 0.05 | 0.60 | 4,000±10% | 2.60 | 8.00 | 28.0 |
| BF5008M12SH | Hydraulic | 12V | 10.8~13.2 | 0.15 | 1.80 | 5,000±10% | 3.40 | 11.4 | 33.0 |
| BF5008H12SH | Hydraulic | 12V | 10.8~13.2 | 0.23 | 2.76 | 6,000±10% | 4.20 | 19.0 | 38.0 |

- * 以上为额定电压下的常规参数(All readings are typical values at rated voltage)
- * 规格如有变动不另行通知(Specifications are subjected to change without prior notice)