


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

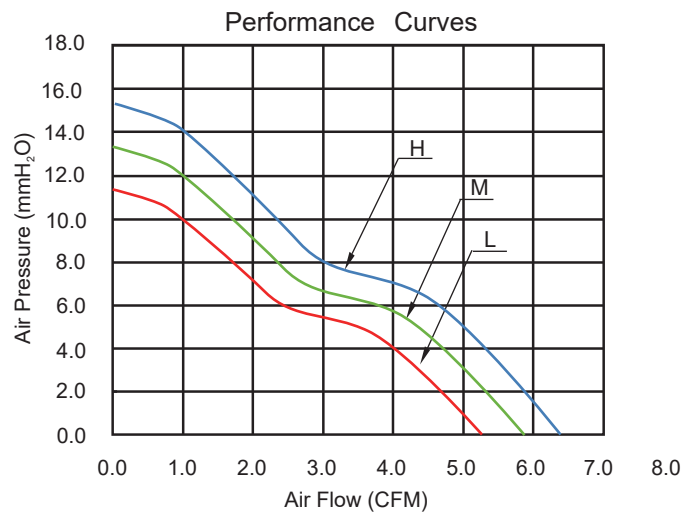

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
BF5010L05S (Frameless) BF5010L05D (Frameless)	Sleeve 2-Ball	5V	0.20	1.00	3,000 ± 10%	4.5	9.8	23	Φ45 x 10
BF5010M05S (Frameless) BF5010M05D (Frameless)	Sleeve 2-Ball	5V	0.23	1.15	3,500 ± 10%	5.2	11.5	26	Φ45 x 10
BF5010H05S (Frameless) BF5010H05D (Frameless)	Sleeve 2-Ball	5V	0.28	1.40	4,000 ± 10%	5.9	13.1	29	Φ45 x 10
BF5010L12S (Frameless) BF5010L12D (Frameless)	Sleeve 2-Ball	12V	0.16	1.92	3,500 ± 10%	5.2	11.5	26	Φ45 x 10
BF5010M12S (Frameless) BF5010M12D (Frameless)	Sleeve 2-Ball	12V	0.21	2.52	4,000 ± 10%	5.9	13.1	29	Φ45 x 10
BF5010H12S (Frameless) BF5010H12D (Frameless)	Sleeve 2-Ball	12V	0.26	3.12	4,500 ± 10%	6.7	14.8	33	Φ45 x 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.