


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C ~ +70°C
Humidity: 35% ~ 85%RH
- Store Temperature :
Temperature: -40°C ~ +70°C
Humidity: 35% ~ 85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

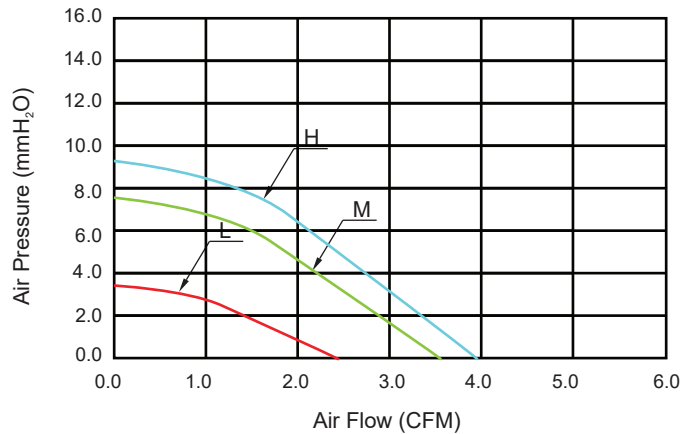

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC5020L05S	Sleeve	5V	0.13	0.65	3,000 ± 10%	2.40	3.50	25.0	50 X 50 X 20
CC5020L05D	2-Ball								
CC5020M05S	Sleeve	5V	0.22	1.10	4,000 ± 10%	3.40	7.40	31.0	50 X 50 X 20
CC5020M05D	2-Ball								
CC5020H05S	Sleeve	5V	0.33	1.65	4,500 ± 10%	3.90	9.35	34.0	50 X 50 X 20
CC5020H05D	2-Ball								
CC5020L12S	Sleeve	12V	0.08	0.96	3,500 ± 10%	2.90	5.45	27.0	50 X 50 X 20
CC5020L12D	2-Ball								
CC5020M12S	Sleeve	12V	0.15	1.80	4,500 ± 10%	3.90	9.35	34.0	50 X 50 X 20
CC5020M12D	2-Ball								
CC5020H12S	Sleeve	12V	0.25	3.00	5,500 ± 10%	4.90	13.45	38.0	50 X 50 X 20
CC5020H12D	2-Ball								
CC5020L24S	Sleeve	24V	0.05	1.20	3,500 ± 10%	2.90	5.45	27.0	50 X 50 X 20
CC5020L24D	2-Ball								
CC5020M24S	Sleeve	24V	0.10	2.40	4,500 ± 10%	3.90	9.35	34.0	50 X 50 X 20
CC5020M24D	2-Ball								
CC5020H24S	Sleeve	24V	0.15	3.60	5,500 ± 10%	4.90	13.45	38.0	50 X 50 X 20
CC5020H24D	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.