

Unit: mm


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

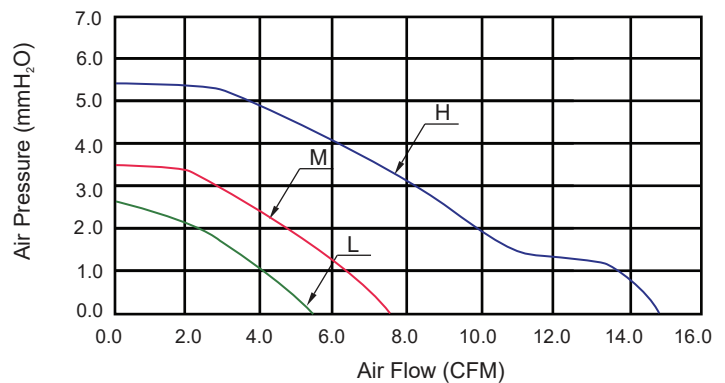

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC5020L05S I	Sleeve	5V	0.12	0.60	3,500 ± 10%	5.60	2.70	29.0	50 X 50 X 20
CC5020L05D I	2-Ball								
CC5020M05S I	Sleeve	5V	0.20	1.00	4,500 ± 10%	7.20	3.50	33.0	50 X 50 X 20
CC5020M05D I	2-Ball								
CC5020H05S I	Sleeve	5V	0.35	1.75	5,500 ± 10%	14.2	5.30	37.0	50 X 50 X 20
CC5020H05D I	2-Ball								
CC5020L12S I	Sleeve	12V	0.09	1.08	3,500 ± 10%	5.60	2.70	29.0	50 X 50 X 20
CC5020L12D I	2-Ball								
CC5020M12S I	Sleeve	12V	0.12	1.80	4,500 ± 10%	7.20	3.50	33.0	50 X 50 X 20
CC5020M12D I	2-Ball								
CC5020H12S I	Sleeve	12V	0.25	3.00	5,500 ± 10%	14.2	5.30	37.0	50 X 50 X 20
CC5020H12D I	2-Ball								
CC5020L24S I	Sleeve	24V	0.05	1.20	3,500 ± 10%	5.60	2.70	29.0	50 X 50 X 20
CC5020L24D I	2-Ball								
CC5020M24S I	Sleeve	24V	0.07	1.68	4,500 ± 10%	7.20	3.50	33.0	50 X 50 X 20
CC5020M24D I	2-Ball								
CC5020H24S I	Sleeve	24V	0.08	1.92	5,500 ± 10%	14.2	5.30	37.0	50 X 50 X 20
CC5020H24D I	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.