

Unit: (mm)


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

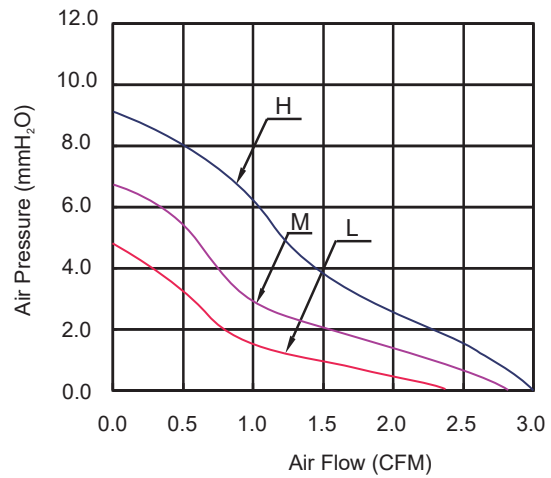

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF6008L05SH	Hydraulic	5V	0.15	0.75	3,000 ± 10%	2.3	4.8	21	60 X 44.5 X 8.8
BF6008M05SH	Hydraulic	5V	0.20	1.00	3,500 ± 10%	2.7	6.5	24	60 X 44.5 X 8.8
BF6008H05SH	Hydraulic	5V	0.25	1.25	4,000 ± 10%	3.0	8.6	27	60 X 44.5 X 8.8
BF6008L12SH	Hydraulic	12V	0.10	1.20	3,000 ± 10%	2.3	4.8	21	60 X 44.5 X 8.8
BF6008M12SH	Hydraulic	12V	0.15	2.16	3,500 ± 10%	2.7	6.5	24	60 X 44.5 X 8.8
BF6008H12SH	Hydraulic	12V	0.20	3.12	4,000 ± 10%	3.0	8.6	27	60 X 44.5 X 8.8

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.