



## DC Blower Fan 60x60x12mm

### ■ 尺寸图 (DIMENSION DRAWING)

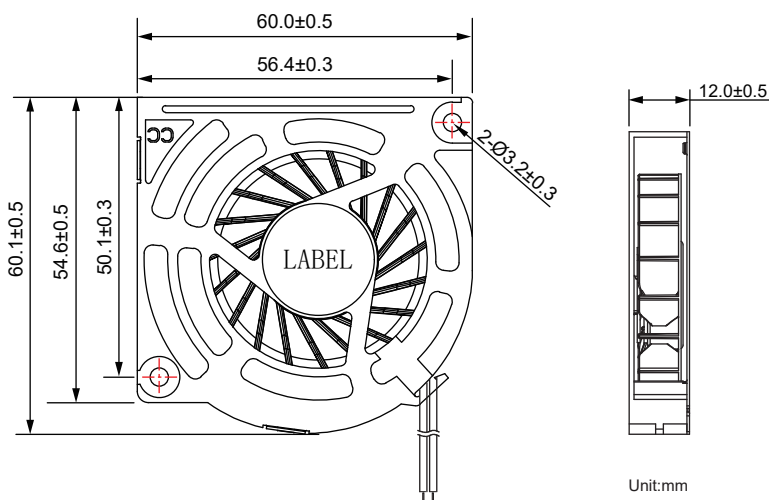

- \* 轴承类型: 含油轴承, 双滚珠轴承, 液压轴承  
(Bearing type: Sleeve, 2-Ball, Hydraulic)
- \* 材料(Material):  
扇叶(Impeller): PBT  
框(Frame): PBT & SECC
- \* 引线(Lead wire):  
UL1061 AWG #26 or equivalent  
红色线正级 Red Wire Positive (+)  
黑色线负级 Black Wire Negative (-)
- \* 可选择增加风扇功能(Functions are optional)
- \* 重量(Weight): 28g

### ■ 风压&风量曲线图 P and Q CURVE

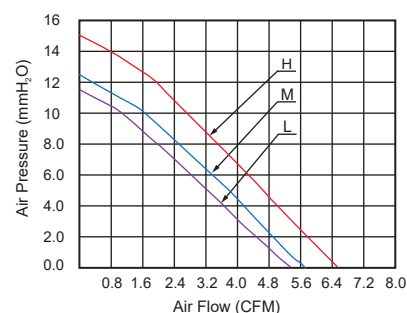

| 型号<br>Model | 轴承类型<br>Bearing Type | 电压<br>Rated Voltage | 电压范围<br>Operation Voltage | 电流<br>Current | 功率<br>Input Power | 转速<br>Speed | 风量<br>Air Flow | 风压<br>Static Pressure | 噪音<br>Noise Level |
|-------------|----------------------|---------------------|---------------------------|---------------|-------------------|-------------|----------------|-----------------------|-------------------|
|             |                      | VDC                 | VDC                       | Amp           | Watt              | RPM         | CFM            | MM-H <sub>2</sub> O   | dBA               |
| BF6012L05S  | Sleeve               | 5V                  | 4.5~5.5                   | 0.21          | 1.05              | 3,500±10%   | 5.20           | 11.80                 | 27.0              |
| BF6012L05D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012L05SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |
| BF6012M05S  | Sleeve               | 5V                  | 4.5~5.5                   | 0.34          | 1.70              | 4,000±10%   | 5.80           | 12.50                 | 30.8              |
| BF6012M05D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012M05SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |
| BF6012H05S  | Sleeve               | 5V                  | 4.5~5.5                   | 0.43          | 2.15              | 4,500±10%   | 6.50           | 14.80                 | 32.4              |
| BF6012H05D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012H05SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |
| BF6012L12S  | Sleeve               | 12V                 | 10.8~13.2                 | 0.10          | 1.20              | 3,500±10%   | 5.20           | 11.80                 | 27.0              |
| BF6012L12D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012L12SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |
| BF6012M12S  | Sleeve               | 12V                 | 10.8~13.2                 | 0.15          | 1.80              | 4,000±10%   | 5.80           | 12.40                 | 30.8              |
| BF6012M12D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012M12SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |
| BF6012H12S  | Sleeve               | 12V                 | 10.8~13.2                 | 0.20          | 2.40              | 4,500±10%   | 6.50           | 14.80                 | 34.7              |
| BF6012H12D  | 2-Ball               |                     |                           |               |                   |             |                |                       |                   |
| BF6012H12SH | Hydraulic            |                     |                           |               |                   |             |                |                       |                   |

- \* 以上为额定电压下的常规参数(All readings are typical values at rated voltage)
- \* 规格如有变动不另行通知(Specifications are subjected to change without prior notice)