

Unit: mm


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

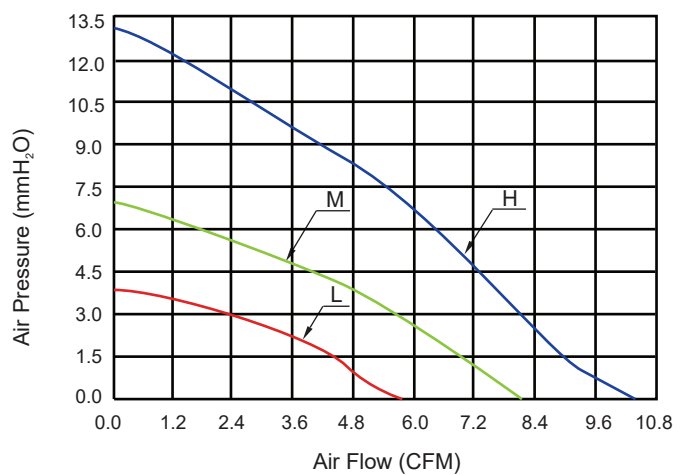

Item No.	Bearing	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
BF6028L05S	Sleeve	5V	0.14	0.70	3,000 ± 10%	5.90	3.60	27.0	60 X 60 X 28
BF6028L05D	2-Ball								
BF6028M05S	Sleeve	5V	0.20	1.00	4,000 ± 10%	8.10	7.30	36.0	60 X 60 X 28
BF6028M05D	2-Ball								
BF6028H05S	Sleeve	5V	0.25	1.25	5,000 ± 10%	10.10	12.80	45.0	60 X 60 X 28
BF6028H05D	2-Ball								
BF6028L12S	Sleeve	12V	0.07	0.84	3,000 ± 10%	5.90	3.60	27.0	60 X 60 X 28
BF6028L12D	2-Ball								
BF6028M12S	Sleeve	12V	0.10	1.20	4,000 ± 10%	8.10	7.30	36.0	60 X 60 X 28
BF6028M12D	2-Ball								
BF6028H12S	Sleeve	12V	0.15	1.80	5,000 ± 10%	10.10	12.80	45.0	60 X 60 X 28
BF6028H12D	2-Ball								
BF6028L24S	Sleeve	24V	0.05	1.20	3,000 ± 10%	5.90	3.60	27.0	60 X 60 X 28
BF6028L24D	2-Ball								
BF6028M24S	Sleeve	24V	0.08	1.92	4,000 ± 10%	8.10	7.30	36.0	60 X 60 X 28
BF6028M24D	2-Ball								
BF6028H24S	Sleeve	24V	0.10	2.40	5,000 ± 10%	10.10	12.80	45.0	60 X 60 X 28
BF6028H24D	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.