


## DC Blower Fan 70x70x8mm


### ■ 尺寸图 (DIMENSION DRAWING)

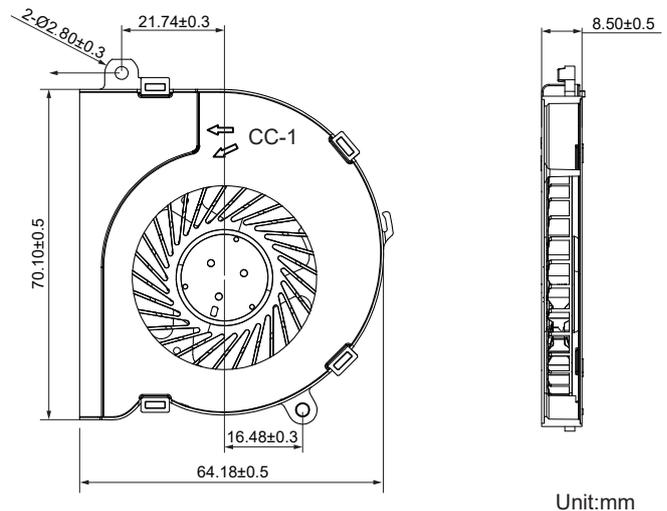

Unit:mm

- \* 轴承类型: 液压, 流体动压  
(Bearing type: Hydraulic, FDB)
- \* 材料 (Material):  
扇叶 (Impeller): PBT  
框 (Frame): PBT & SGCC & SPCC
- \* 引线 (Lead wire):  
UL3302 AWG #34 or equivalent  
红色线正级 Red Wire Positive (+)  
黑色线负级 Black Wire Negative (-)
- \* 可选择增加风扇功能 (Functions are optional)
- \* 重量 (Weight): 31g

### ■ 风压&风量曲线图 P and Q CURVE

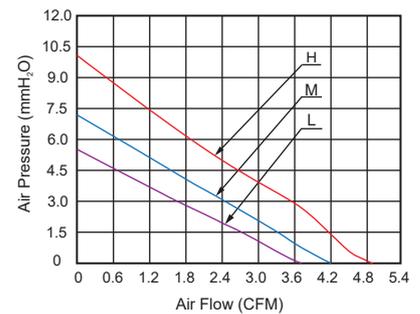

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage	电压范围 Operation Voltage	电流 Current	功率 Input Power	转速 Speed	风量 Air Flow	风压 Static Pressure	噪音 Noise Level
		VDC	VDC	Amp	Watt	RPM	CFM	MM-H <sub>2</sub> O	dBA
BF7008L05S	Hydraulic	5V	4.5~5.5	0.08	0.40	3,000±10%	3.7	5.40	20
BF7008L05S3	FDB								
BF7008M05S	Hydraulic	5V	4.5~5.5	0.12	0.60	3,500±10%	4.2	7.10	24
BF7008M05S3	FDB								
BF7008H05S	Hydraulic	5V	4.5~5.5	0.20	1.00	4,000±10%	4.9	10.0	28
BF7008H05S3	FDB								
BF7008L12S	Hydraulic	12V	10.8~13.2	0.04	0.48	3,000±10%	3.7	5.40	20
BF7008L12S3	FDB								
BF7008M12S	Hydraulic	12V	10.8~13.2	0.06	0.72	3,500±10%	4.2	7.10	24
BF7008M12S3	FDB								
BF7008H12S	Hydraulic	12V	10.8~13.2	0.08	0.96	4,000±10%	4.9	10.0	28
BF7008H12S3	FDB								

- \* 以上为额定电压下的常规参数 (All readings are typical values at rated voltage)
- \* 规格如有变动不另行通知 (Specifications are subjected to change without prior notice)