
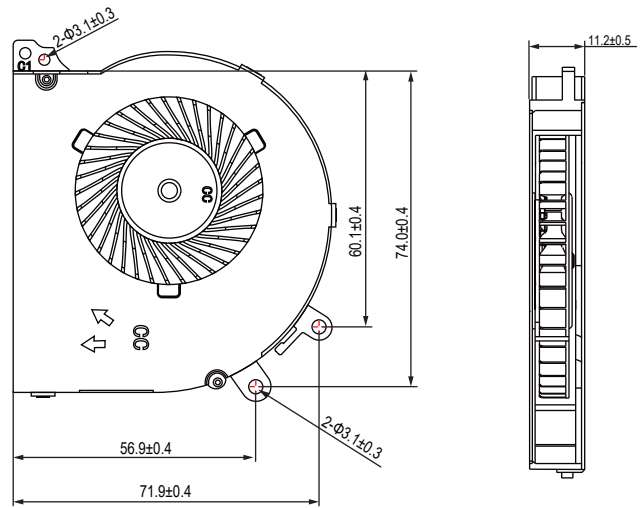


DC Blower Fan 75x75x12mm


■ 尺寸图 (DIMENSION DRAWING)

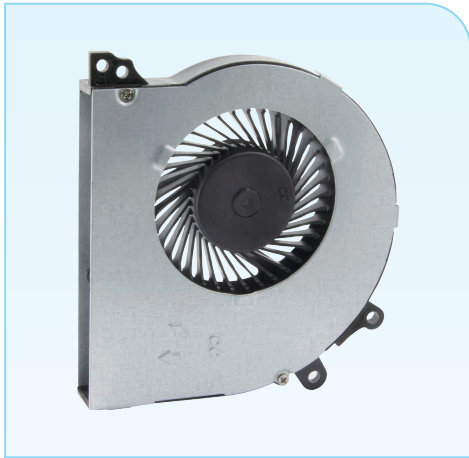

Unit:mm

- * 轴承类型: 液压轴承, 双滚珠轴承 (Bearing type: Hydraulic, 2-Ball)
- * 材料(Material):
扇叶(Impeller): PBT
框(Frame): PBT & Aluminium
- * 引线(Lead wire):
UL1571 AWG #26 or equivalent
红色线正级 Red Wire Positive (+)
黑色线负级 Black Wire Negative (-)
- * 可选择增加风扇功能 (Functions are optional)
- * 重量(Weight): 48g

■ 风压&风量曲线图 P and Q CURVE

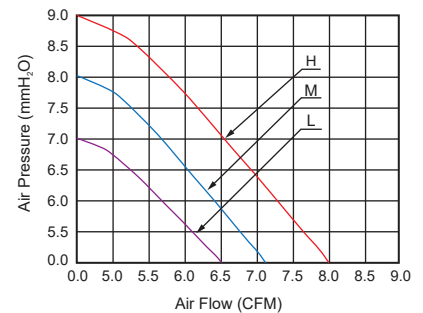

型号 Model	轴承类型 Bearing Type	电压 Rated Voltage	电压范围 Operation Voltage	电流 Current	功率 Input Power	转速 Speed	风量 Air Flow	风压 Static Pressure	噪音 Noise Level
		VDC	VDC	Amp	Watt	RPM	CFM	MM-H ₂ O	dBA
BF7512L05SH	Hydraulic	5V	4.5~5.5	0.30	1.50	2,200±10%	6.50	7.00	24.0
BF7512L05D	2-Ball								
BF7512M05SH	Hydraulic	5V	4.5~5.5	0.38	1.90	2,600±10%	7.10	8.00	28.0
BF7512M05D	2-Ball								
BF7512H05SH	Hydraulic	5V	4.5~5.5	0.43	2.15	3,100±10%	8.00	9.00	31.0
BF7512H05D	2-Ball								
BF7512L12SH	Hydraulic	12V	7~13.2	0.13	1.56	2,200±10%	6.50	7.00	24.0
BF7512L12D	2-Ball								
BF7512M12SH	Hydraulic	12V	7~13.2	0.16	1.92	2,600±10%	7.10	8.00	28.0
BF7512M12D	2-Ball								
BF7512H12SH	Hydraulic	12V	7~13.2	0.19	2.28	3,100±10%	8.00	9.00	32.0
BF7512H12D	2-Ball								

- * 以上为额定电压下的常规参数 (All readings are typical values at rated voltage)
- * 规格如有变动不另行通知 (Specifications are subjected to change without prior notice)