


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

### Performance Curves

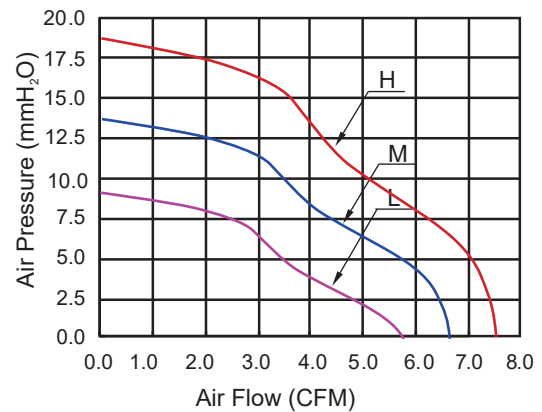

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
BF7515L12S BF7515L12D	Sleeve 2-Ball	12V	0.14	1.68	2,500 ± 10%	5.70	9.10	29	75 X 78 X 16
BF7515M12S BF7515M12D	Sleeve 2-Ball	12V	0.20	2.40	3,000 ± 10%	6.50	13.4	34	75 X 78 X 16
BF7515H12S BF7515H12D	Sleeve 2-Ball	12V	0.30	3.60	3,500 ± 10%	7.30	18.3	39	75 X 78 X 16
BF7515L24S BF7515L24D	Sleeve 2-Ball	24V	0.09	2.92	2,500 ± 10%	5.70	9.10	29	75 X 78 X 16
BF7515M24S BF7515M24D	Sleeve 2-Ball	24V	0.13	3.12	3,000 ± 10%	6.50	13.4	34	75 X 78 X 16
BF7515H24S BF7515H24D	Sleeve 2-Ball	24V	0.16	3.84	3,500 ± 10%	7.30	18.3	39	75 X 78 X 16

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.