

Unit: mm


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

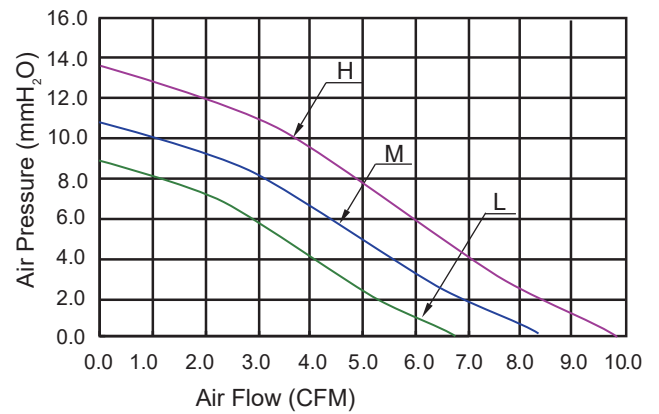

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
BF7515L12S I BF7515L12D I	Sleeve 2-Ball	12V	0.13	1.56	2,500 ± 10%	6.90	9.40	27	75 X 70 X 15
BF7515M12S I BF7515M12D I	Sleeve 2-Ball	12V	0.16	1.92	3,000 ± 10%	8.30	11.3	32	75 X 70 X 15
BF7515H12S I BF7515H12D I	Sleeve 2-Ball	12V	0.19	2.28	3,500 ± 10%	9.70	13.2	37	75 X 70 X 15
BF7515L24S I BF7515L24D I	Sleeve 2-Ball	24V	0.08	1.92	2,500 ± 10%	6.90	9.4	27	75 X 70 X 15
BF7515M24S I BF7515M24D I	Sleeve 2-Ball	24V	0.12	2.88	3,000 ± 10%	8.30	11.3	32	75 X 70 X 15
BF7515H24S I BF7515H24D I	Sleeve 2-Ball	24V	0.15	3.60	3,500 ± 10%	9.70	13.2	37	75 X 70 X 15

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.