


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

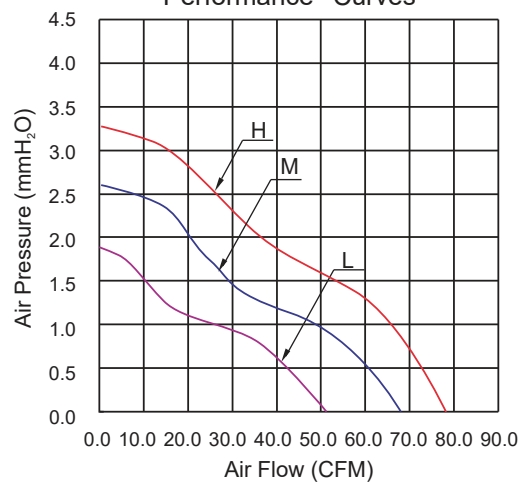

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC12025L12S (Frameless)	Sleeve	12V	0.11	1.32	1,200 ± 10%	50.5	1.80	27	Φ110 x 144 x 23
CC12025L12SH (Frameless)	Hydraulic								
CC12025M12S (Frameless)	Sleeve	12V	0.20	2.40	1,700 ± 10%	67.0	2.60	31	Φ110 x 144 x 23
CC12025M12SH (Frameless)	Hydraulic								
CC12025H12S (Frameless)	Sleeve	12V	0.26	3.12	2,200 ± 10%	79.0	3.30	36	Φ110 x 144 x 23
CC12025H12SH (Frameless)	Hydraulic								
CC12025L18S (Frameless)	Sleeve	18V	0.06	0.72	1,200 ± 10%	50.5	1.80	27	Φ110 x 144 x 23
CC12025L18SH (Frameless)	Hydraulic								
CC12025M18S (Frameless)	Sleeve	18V	0.15	2.70	1,700 ± 10%	67.0	2.60	31	Φ110 x 144 x 23
CC12025M18SH (Frameless)	Hydraulic								
CC12025H18S (Frameless)	Sleeve	18V	0.19	3.42	2,200 ± 10%	79.0	3.30	36	Φ110 x 144 x 23
CC12025H18SH (Frameless)	Hydraulic								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.