


Unit: (mm)

General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

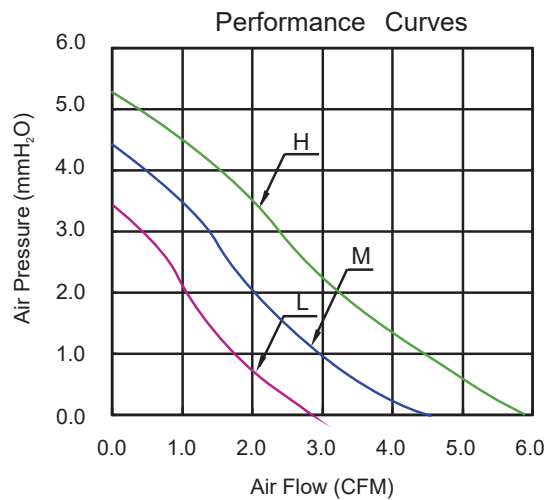

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC3010L05S (Frameless)	Sleeve	5V	0.16	0.80	7,000 ± 10%	3.2	2.8	23	Φ28 X 10
CC3010L05SH (Frameless)	Hydraulic								
CC3010L05D (Frameless)	2-Ball								
CC3010M05S (Frameless)	Sleeve	5V	0.20	1.00	9,000 ± 10%	4.3	4.3	27	Φ28 X 10
CC3010M05SH (Frameless)	Hydraulic								
CC3010M05D (Frameless)	2-Ball								
CC3010H05S (Frameless)	Sleeve	5V	0.26	1.30	11,000 ± 10%	5.2	5.9	32	Φ28 X 10
CC3010H05SH (Frameless)	Hydraulic								
CC3010H05D (Frameless)	2-Ball								
CC3010L12S (Frameless)	Sleeve	12V	0.09	1.08	7,000 ± 10%	3.2	2.8	23	Φ28 X 10
CC3010L12SH (Frameless)	Hydraulic								
CC3010L12D (Frameless)	2-Ball								
CC3010M12S (Frameless)	Sleeve	12V	0.12	1.44	9,000 ± 10%	4.3	4.3	27	Φ28 X 10
CC3010M12SH (Frameless)	Hydraulic								
CC3010M12D (Frameless)	2-Ball								
CC3010L05S (Frameless)	Sleeve	12V	0.15	1.80	11,000 ± 10%	5.2	5.9	32	Φ28 X 10
CC3010L05SH (Frameless)	Hydraulic								
CC3010L05D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.