

Unit: (mm)


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

Performance Curves

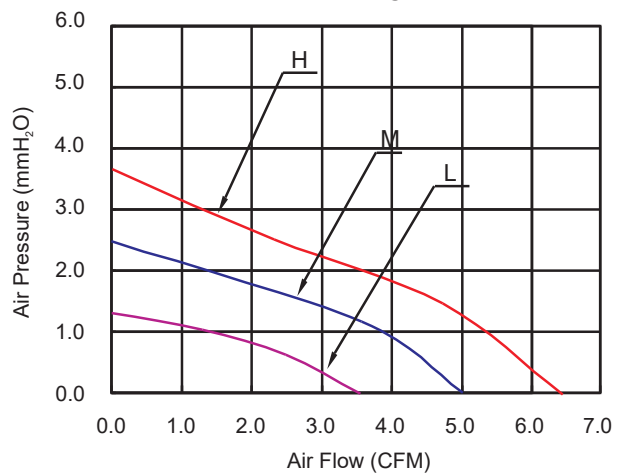

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC350L05S (Frameless)	Sleeve	5V	0.14	0.70	5,000 ± 10%	3.5	1.3	23	Φ32 X 10
CC3510L05D (Frameless)	2-Ball								
CC3510M05S (Frameless)	Sleeve	5V	0.16	0.80	7,000 ± 10%	5.0	2.5	27	Φ32 X 10
CC3510M05D (Frameless)	2-Ball								
CC3510H05S (Frameless)	Sleeve	5V	0.20	1.00	9,000 ± 10%	6.5	3.7	31	Φ32 X 10
CC3510H05D (Frameless)	2-Ball								
CC3510L12S (Frameless)	Sleeve	12V	0.08	0.96	5,000 ± 10%	3.5	1.3	23	Φ32 X 10
CC3510L12D (Frameless)	2-Ball								
CC3510M12S (Frameless)	Sleeve	12V	0.10	1.20	7,000 ± 10%	5.0	2.5	27	Φ32 X 10
CC3510M12D (Frameless)	2-Ball								
CC3510H12S (Frameless)	Sleeve	12V	0.12	1.44	9,000 ± 10%	6.5	3.7	31	Φ32 X 10
CC3510H12D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.