


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black (FG)Yellow
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

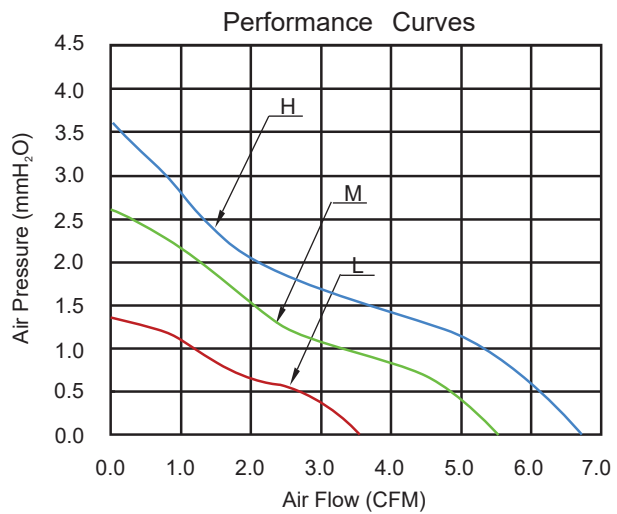

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC4010L05S (Frameless)	Sleeve	5V	0.09	0.45	4,000 ± 10%	3.6	1.4	21	Φ37.5 X 10
CC4010L05D (Frameless)	2-Ball								
CC4010M05S (Frameless)	Sleeve	5V	0.11	0.65	5,000 ± 10%	5.6	2.6	23	Φ37.5 X 10
CC4010M05D (Frameless)	2-Ball								
CC4010H05S (Frameless)	Sleeve	5V	0.13	0.65	6,000 ± 10%	6.8	3.6	27	Φ37.5 X 10
CC4010H05D (Frameless)	2-Ball								
CC4010L12S (Frameless)	Sleeve	12V	0.06	0.72	4,000 ± 10%	3.6	1.4	21	Φ37.5 X 10
CC4010L12D (Frameless)	2-Ball								
CC4010M12S (Frameless)	Sleeve	12V	0.07	0.84	5,000 ± 10%	5.6	2.6	23	Φ37.5 X 10
CC4010M12D (Frameless)	2-Ball								
CC4010H12S (Frameless)	Sleeve	12V	0.08	0.96	6,000 ± 10%	6.8	3.6	27	Φ37.5 X 10
CC4010H12D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.