


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

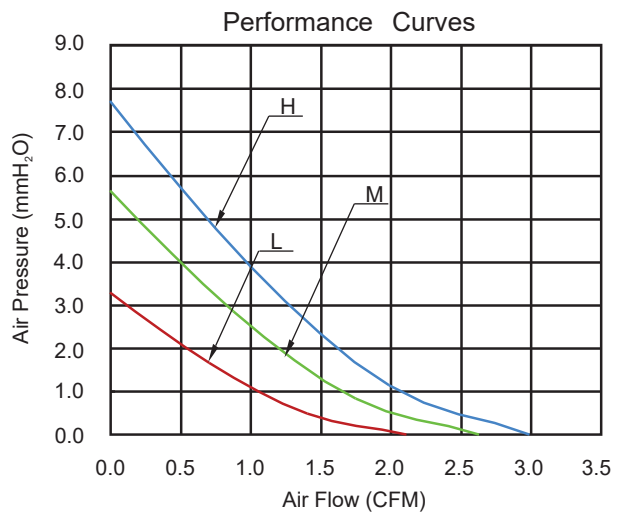

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC4010L05S II (Frameless) CC4010L05D II (Frameless)	Sleeve 2-Ball	5V	0.24	1.20	4,000 ± 10%	2.1	3.2	21	Φ36 x 10
CC4010M05S II (Frameless) CF4010M05D II (Frameless)	Sleeve 2-Ball	5V	0.30	1.50	5,000 ± 10%	2.6	5.5	26	Φ36 x 10
CC4010H05S II (Frameless) CC4010H05D II (Frameless)	Sleeve 2-Ball	5V	0.36	1.80	6,000 ± 10%	3.0	7.6	31	Φ36 x 10
CC4010L12S II (Frameless) CC4010L12D II (Frameless)	Sleeve 2-Ball	12V	0.10	1.20	4,000 ± 10%	2.1	3.2	21	Φ36 x 10
CC4010M12S II (Frameless) CC4010M12D II (Frameless)	Sleeve 2-Ball	12V	0.14	1.68	5,000 ± 10%	2.6	5.5	26	Φ36 x 10
CC4010H12S II (Frameless) CC4010H12D II (Frameless)	Sleeve 2-Ball	12V	0.18	2.16	6,000 ± 10%	3.0	7.6	31	Φ36 x 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.