


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

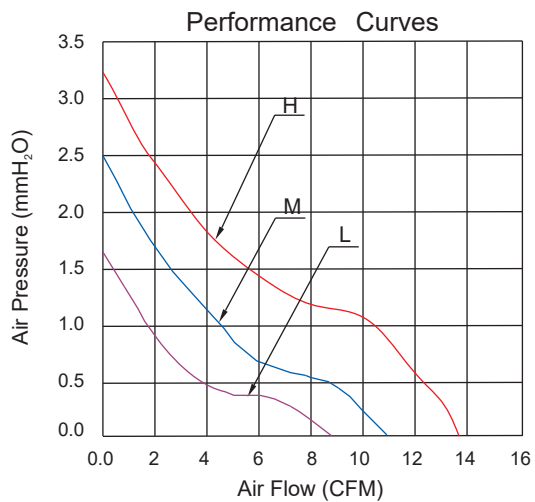

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC5010L12S (Frameless)	Sleeve	12V	0.07	0.84	3,500 ± 10%	8.60	1.60	21	50 X 50 X 10
CC5010L12D (Frameless)	2-Ball								
CC5010M12S (Frameless)	Sleeve	12V	0.14	1.68	4,500 ± 10%	11.00	2.50	25	50 X 50 X 10
CC5010M12D (Frameless)	2-Ball								
CC5010H12S (Frameless)	Sleeve	12V	0.18	2.16	5,500 ± 10%	13.80	3.30	30	50 X 50 X 10
CC5010H12D (Frameless)	2-Ball								
CC5010L24S (Frameless)	Sleeve	24V	0.07	1.68	3,500 ± 10%	8.60	1.60	21	50 X 50 X 10
CC5010L24D (Frameless)	2-Ball								
CC5010M24S (Frameless)	Sleeve	24V	0.09	2.16	4,500 ± 10%	11.00	2.50	25	50 X 50 X 10
CC5010M24D (Frameless)	2-Ball								
CC5010H24S (Frameless)	Sleeve	24V	0.12	2.88	5,500 ± 10%	13.80	3.30	30	50 X 50 X 10
CC5010H24D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.