


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

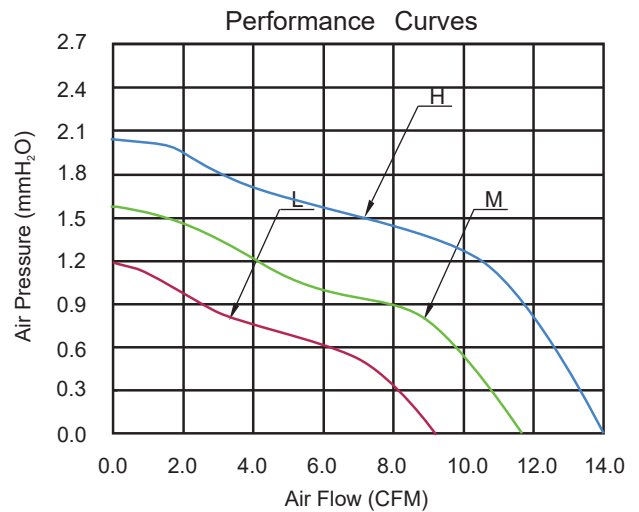

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H2O)	Noise Level (dBA)	Dimension (mm)
CC5010L05S I (Frameless) CC5010L05D I (Frameless) CC5010L05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.10	0.50	3,500 ± 10%	9.0	1.2	22	Φ49 x 10
CC5010M05S I (Frameless) CC5010M05D I (Frameless) CC5010M05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.15	0.75	4,500 ± 10%	11.5	1.6	28	Φ49 x 10
CC5010H05S I (Frameless) CC5010H05D I (Frameless) CC5010H05SH I (Frameless)	Sleeve 2-Ball Hydraulic	5V	0.20	1.00	5,500 ± 10%	14.0	2.0	32	Φ49 x 10
CC5010L12S I (Frameless) CC5010L12D I (Frameless) CC5010L12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.06	0.72	3,500 ± 10%	9.0	1.2	22	Φ49 x 10
CC5010M12S I (Frameless) CC5010M12D I (Frameless) CC5010M12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.07	0.84	4,500 ± 10%	11.5	1.6	28	Φ49 x 10
CC5010H12S I (Frameless) CC5010H12D I (Frameless) CC5010H12SH I (Frameless)	Sleeve 2-Ball Hydraulic	12V	0.08	0.96	5,500 ± 10%	14.0	2.0	32	Φ49 x 10

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.