


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

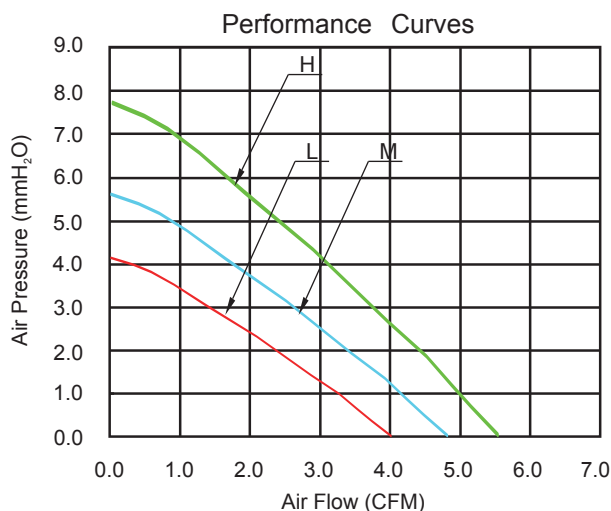

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC6010L05S (Frameless)	Sleeve	5V	0.18	0.90	3,000 ± 10%	4.1	4.0	28	Φ55 x 11
CC6010L05D (Frameless)	2-Ball								
CC6010M05S (Frameless)	Sleeve	5V	0.22	1.10	3,600 ± 10%	4.7	5.7	32	Φ55 x 11
CC6010M05D (Frameless)	2-Ball								
CC6010H05S (Frameless)	Sleeve	5V	0.26	1.30	4,200 ± 10%	5.5	7.9	37	Φ55 x 11
CC6010H05D (Frameless)	2-Ball								
CC6010L12S (Frameless)	Sleeve	12V	0.07	0.84	3,000 ± 10%	4.1	4.0	28	Φ55 x 11
CC6010L12D (Frameless)	2-Ball								
CC6010M12S (Frameless)	Sleeve	12V	0.10	1.20	3,600 ± 10%	4.7	5.7	32	Φ55 x 11
CC6010M12D (Frameless)	2-Ball								
CC6010H12S (Frameless)	Sleeve	12V	0.16	1.92	4,200 ± 10%	5.5	7.9	37	Φ55 x 11
CC6010H12D (Frameless)	2-Ball								

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.