


General Specification :

- Lead Wire: UL Type
(+)Red (-)Black (FG)Yellow
- Operation Temperature :
Temperature: -10°C~+70°C
Humidity: 35%~85%RH
- Store Temperature :
Temperature: -40°C~+70°C
Humidity: 35%~85%RH

Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

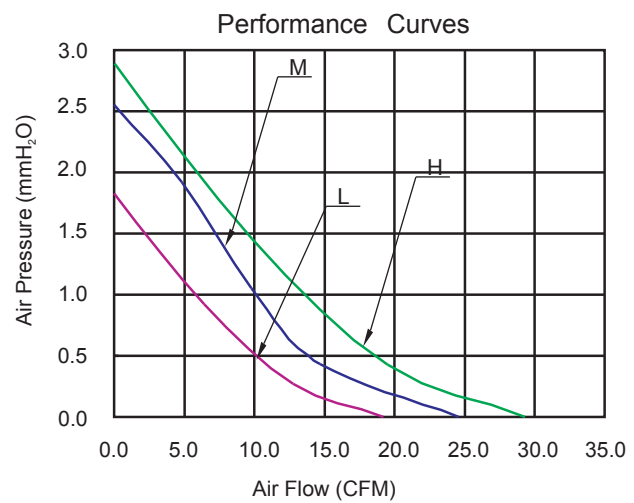

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H ₂ O)	Noise Level (dBA)	Dimension (mm)
CC8010L12S (Frameless)	Sleeve	12V	0.15	1.80	2,500± 10%	19.3	1.84	22.2	Φ74 x 11
CC8010M12S (Frameless)	Sleeve	12V	0.25	3.00	3,200± 10%	24.7	2.68	28.7	Φ74 x 11
CC8010H12S (Frameless)	Sleeve	12V	0.35	4.20	4,000 ± 10%	29.1	2.87	34.8	Φ74 x 11

Notes: ©All readings are typical values at rated voltage.
©Specifications are subjected to change without prior notice.