


### General Specification :

- Lead Wire: UL Type  
(+)Red (-)Black (FG)Yellow
- Operation Temperature :  
Temperature: -10°C~+70°C  
Humidity: 35%~85%RH
- Store Temperature :  
Temperature: -40°C~+70°C  
Humidity: 35%~85%RH

### Motor Protection :

- Impedance Protected
- Reverse Polarity Protected

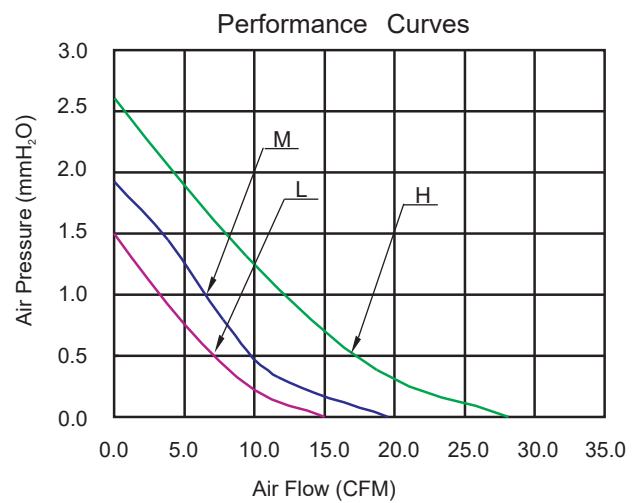

Item No.	Bearing System	Rated Voltage (V DC)	Rated Current (AMP)	Input Power (Watt)	Fan Speed (RPM)	Air Flow (CFM)	Static Pressure (MM-H <sub>2</sub> O)	Noise Level (dBA)	Dimension (mm)
CC8010L12SH (Frameless)	Hydraulic	12V	0.07	0.84	2,000± 10%	15.5	1.50	19.0	Φ74 x 11
CC8010M12SH (Frameless)	Hydraulic	12V	0.11	1.32	2,500± 10%	19.3	1.84	22.2	Φ74 x 11
CC8010H12SH (Frameless)	Hydraulic	12V	0.24	2.88	3,500 ± 10%	27.0	2.60	31.0	Φ74 x 11

Notes: ©All readings are typical values at rated voltage.  
©Specifications are subjected to change without prior notice.